




TAOGLAS®

1.

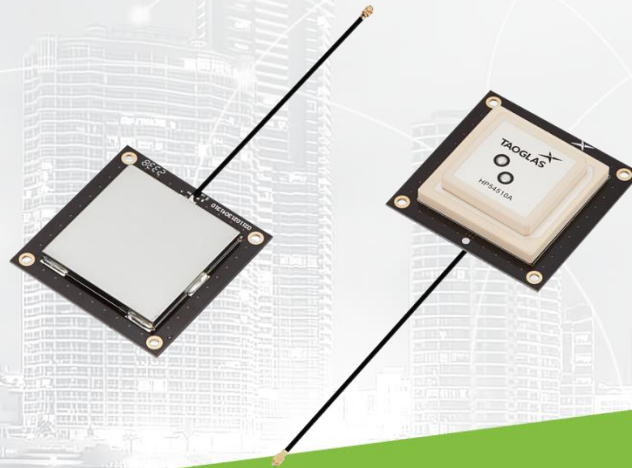

Datasheet

Active L1, L5, L-Band GNSS High Precision Antenna

Part No:
AHP54510.07.0100C

Description

Active L1/L5/L-Band Multiband GNSS High Precision Antenna
45x45x10mm Dual Feed Stacked Patch

Features:


L1, L5, L-Band GNSS Bands Covered
Ceramic Patch Element
Cable: 100mm ϕ 1.13
Connector: IPEX MHFI (U.FL)
Dimensions: 45x45x10mm
RoHS & Reach Compliant

| | | |
|-----------|--------------------------------|-----------|
| 1. | Introduction | 2 |
| 2. | Specification | 3 |
| 3. | Antenna Characteristics | 5 |
| 4. | Radiation Patterns | 8 |
| 5. | LNA Characteristics | 14 |
| 6. | Mechanical Drawing | 18 |
| 7. | Packaging | 19 |
| <hr/> | | |
| | Changelog | 25 |

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



2. Introduction

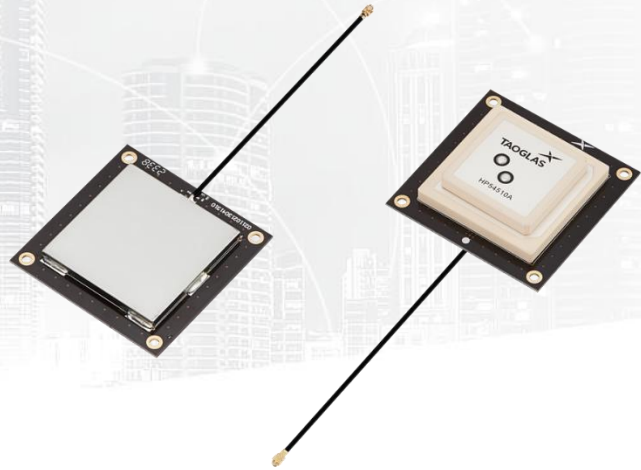

The Taoglas AHP54510, is a multi-band GNSS, high-performance directional antenna for high precision GPS and BeiDou accuracy and fast positioning. It utilizes a 45*45*10mm advanced wide-band dual stacked ceramic patch antenna with optimized gain for GPS L1/L5, Galileo, GLONASS, BeiDou, and L-Band bands.

Typical Applications Include:

- Wearables
- Transportation
- Precision Agriculture
- Navigation
- Robotics
- Autonomous Vehicles


The AHP54510 has been tuned and tested on a 60 x 60 mm ground plane and exhibits excellent radiation patterns. The AHP54510 has been optimized to cover the bands required for the next generation of L1/L5 GNSS receivers that are currently on the market. It is supplied with 4 corner screw holes for easy installation in customer devices.

The AHP54510 has been designed to be a premium solution for high precision GNSS systems, by including the L-Band for High Precision GNSS correction services. The L-Band correction service is utilized in High Precision GNSS systems to decode the satellite transmission and outputs a correction stream, enabling a high precision system to reach genuine centimeter level accuracy.

The cable and connector are fully customizable, for further information please contact your regional Taoglas customer support team to request these services or additional support to integrate and test this antenna's performance in your device.

3. Specification

| GNSS Frequency Bands | | | | | |
|----------------------|-------------------------|---------------------------|--------------------|--------------------|-------------------|
| GPS | L1 1575.42 MHz | L2 1227.6 MHz | L5 1176.45 MHz | | |
| | ■ | □ | ■ | | |
| GLONASS | G1 1602 MHz | G2 1248 MHz | G3 1207 MHz | | |
| | ■ | □ | □ | | |
| Galileo | E1 1575.24 MHz | E5a 1176.45 MHz | E5b 1201.5 MHz | E6 1278.75 MHz | |
| | ■ | ■ | □ | □ | |
| BeiDou | B1C 1575.42 MHz | B1I 1561 MHz | B2a 1176.45 MHz | B2b 1207.14 MHz | B3 1268.52 MHz |
| | ■ | □ | ■ | □ | □ |
| L-Band | L-Band 1542 MHz | | | | |
| | ■ | | | | |
| QZSS (Regional) | L1 1575.42 MHz | L2C 1227.6 MHz | L5 1176.45 MHz | L6 1278.75e6 | |
| | ■ | □ | ■ | □ | |
| IRNSS (Regional) | L5 1176.45 MHz | | | | |
| | ■ | | | | |
| SBAS | L1/E1/B1 1575.42 MHz | L5/B2a/E5a 1176.45 MHz | G1 1602 MHz | G2 1248 MHz | G3 1207 MHz |
| | ■ | ■ | ■ | □ | ■ |

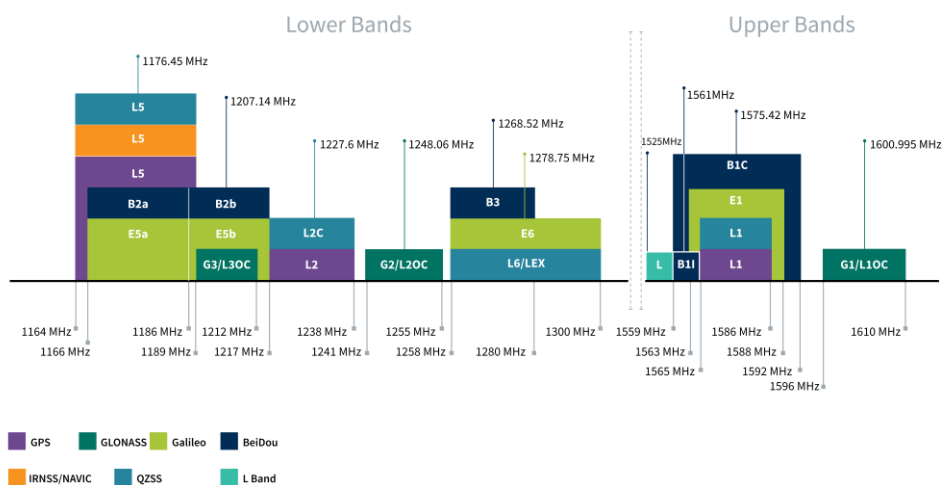

GNSS Bands and Constellations

| GNSS Electrical | | | | | |
|-------------------|-----------|--|-----------|-----------|------------|
| Frequency (MHz) | GPS L5 | L Band | BeiDou_B1 | GPS_L1C | GLONASS_L1 |
| | 1166-1186 | 1525-1559 | 1559-1563 | 1563-1587 | 1593-1610 |
| Efficiency (%) | | | | | |
| AHP54510 | 82.7 | 71.5 | 83.5 | 83.5 | 61.1 |
| Average Gain (dB) | | | | | |
| AHP54510 | -2.33 | | -1.64 | -2.17 | -2.04 |
| Peak Gain (dBi) | | | | | |
| AHP54510 | 4.82 | 4.94 | 5.06 | 5.08 | 4.15 |
| Impedance | | 50 Ω | | | |
| Polarization | | Right-Hand Circularly Polarized (RHCP) | | | |
| Radiation Pattern | | Directional | | | |

*Tested on a 70x70mm Ground plane

| LNA and Filter Electrical Properties | | | | | |
|--------------------------------------|-----------|--|-----------|-----------|------------|
| Frequency (MHz) | GPS L5 | L Band | BeiDou_B1 | GPS_L1C | GLONASS_L1 |
| | 1166-1186 | 1525-1559 | 1559-1563 | 1563-1587 | 1593-1610 |
| LNA Gain (dB) | | | | | |
| AHP54510 | 26.6 | 27.4 | 27.3 | 27.2 | 25.7 |
| Noise Figure (dB) | | | | | |
| AHP54510 | 1.7 | 1.9 | 1.9 | 1.9 | 1.9 |
| Input Voltage (V) | | + 1.8 to 5.5 | | | |
| Current consumption (mA) | | 18 ± 3 | | | |
| Outer Band Attenuation (dB) | | > 70dB @ 700-960 MHz; > 60dB @ 1710-2170 MHz | | | |

| Mechanical | |
|--|----------------------|
| Dimensions | 45x45x5.12mm |
| Total Dimension (Including Shielding Case) | 60x60mm |
| Connector | IPEX MHFI (U.FL) |
| Cable | 1.37mm Coaxial Cable |
| Material | Ceramic |
| Weight | 70g |

| Environmental | |
|---------------------|----------------------------|
| Temperature Range | -40°C to 85°C |
| Storage Temperature | -40°C to 85°C |
| Humidity | Non-condensing 65°C 95% RH |


4. Antenna Characteristics

4.1 Test Setup

AUT




Vector Network Analyzer

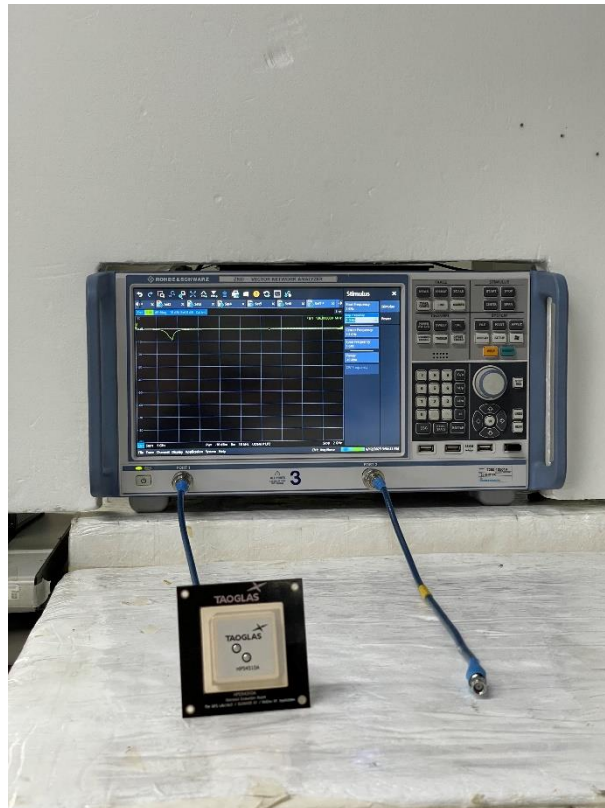


VNA Test Setup – Tested on 70x70mm ground plane


4.2 Return Loss

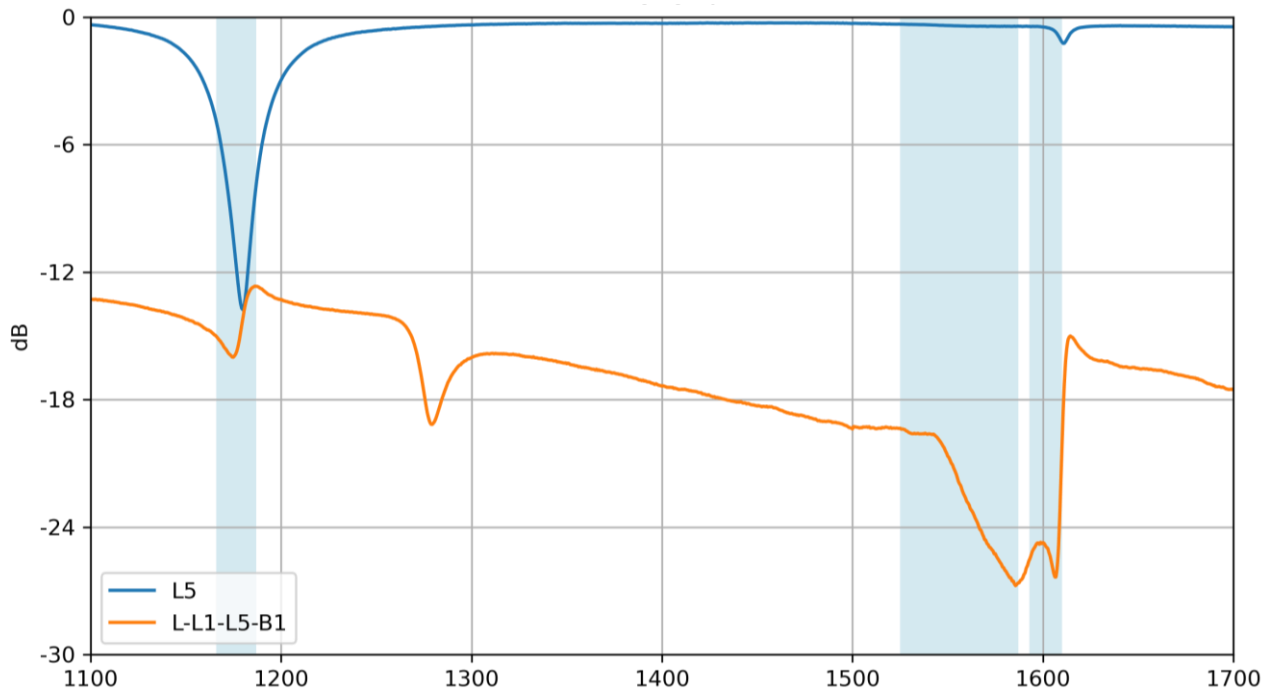


4.3 Efficiency

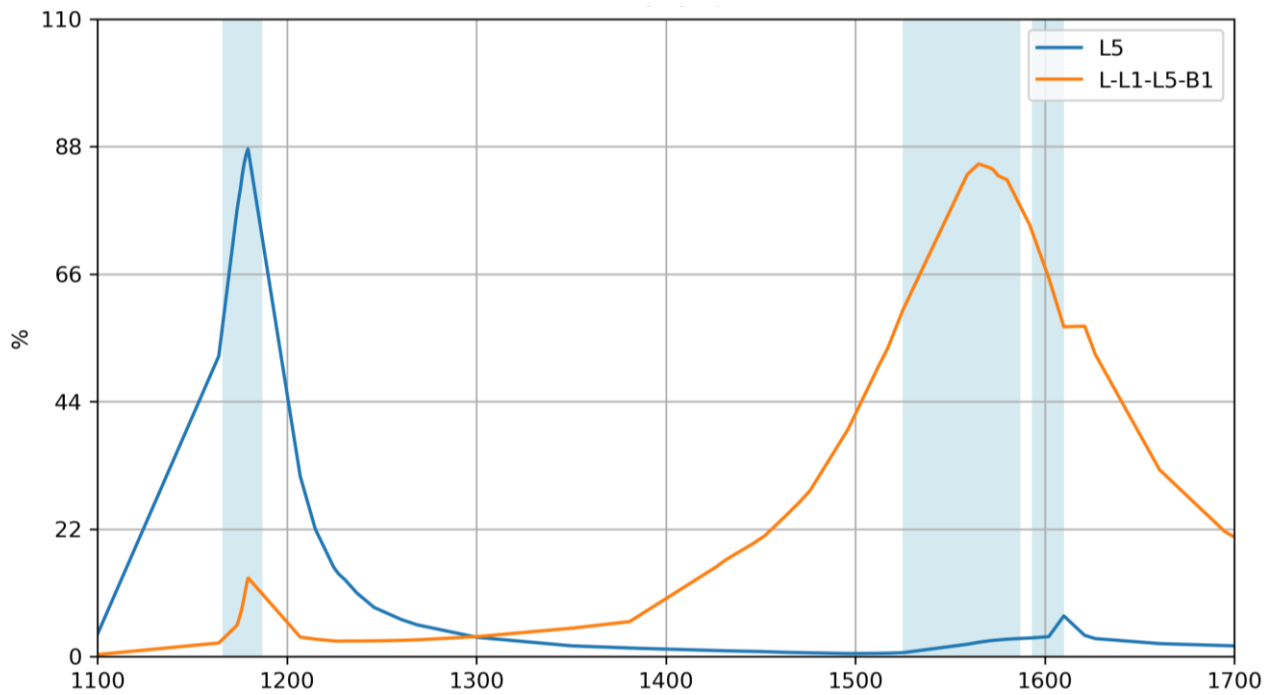

4.4 Average Gain


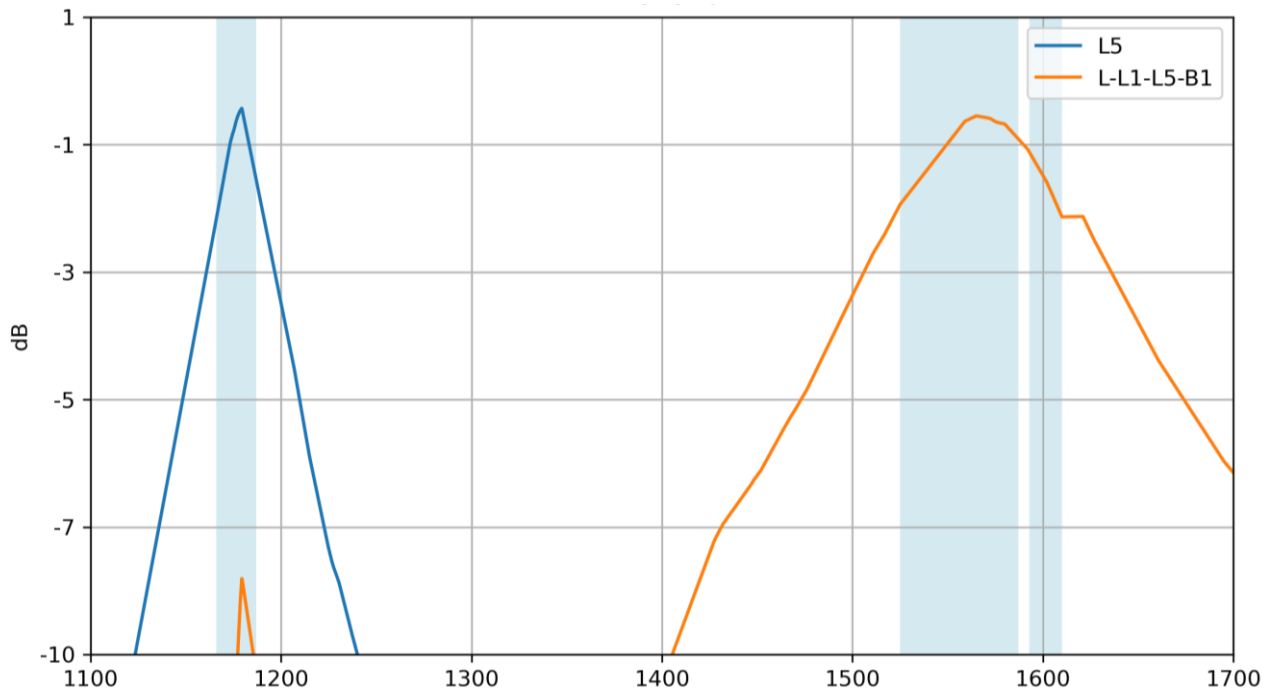


4.5 Peak Gain

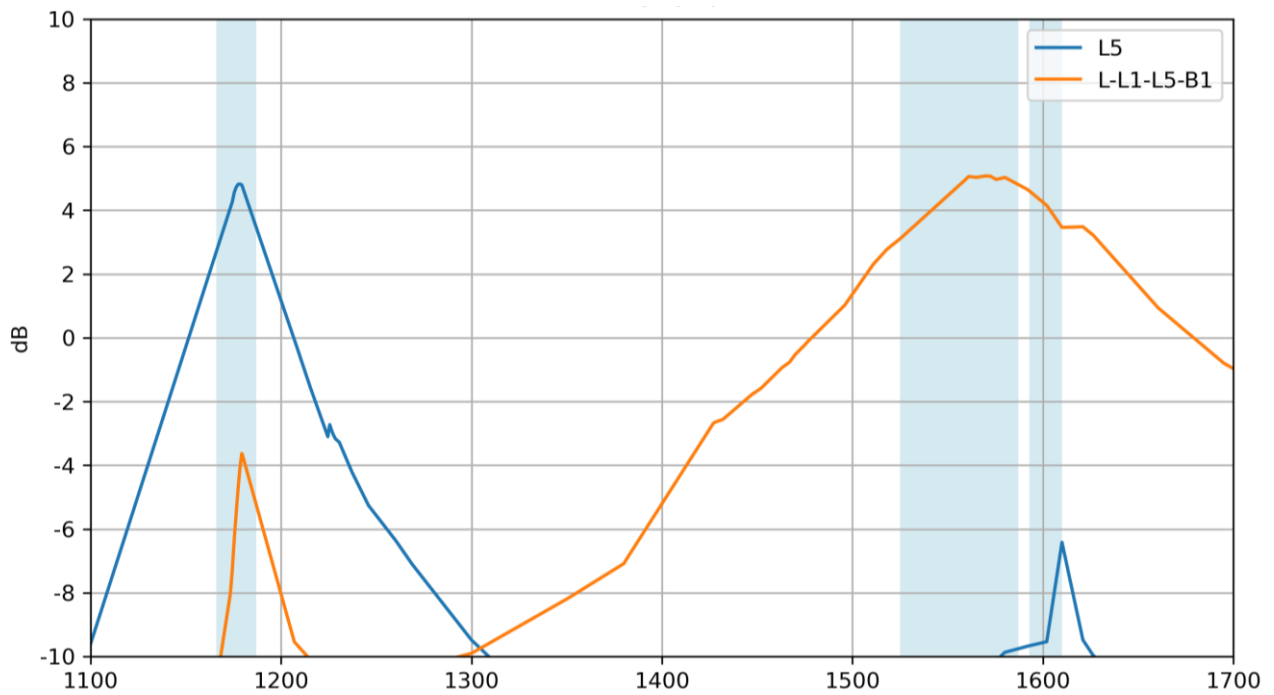



5. Radiation Patterns

5.1 Test Setup


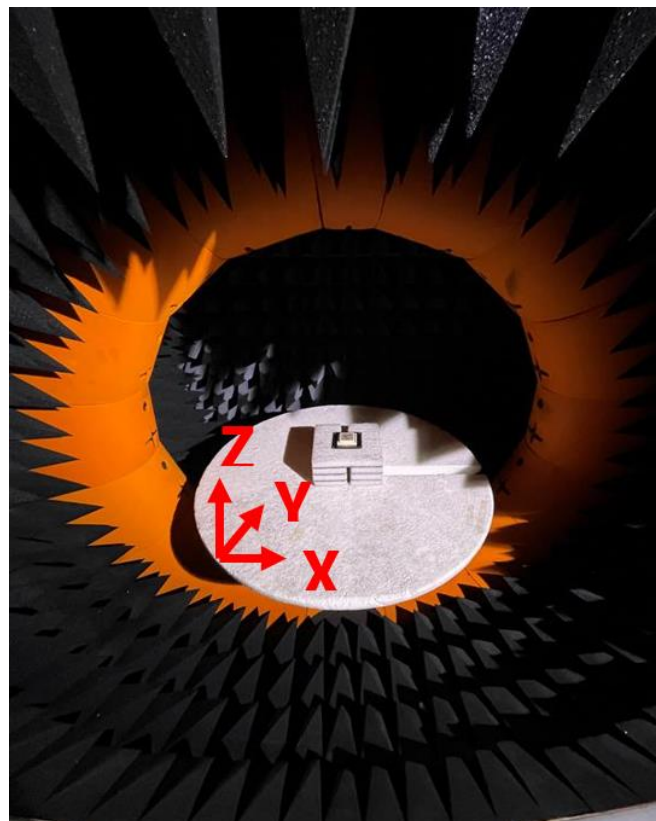
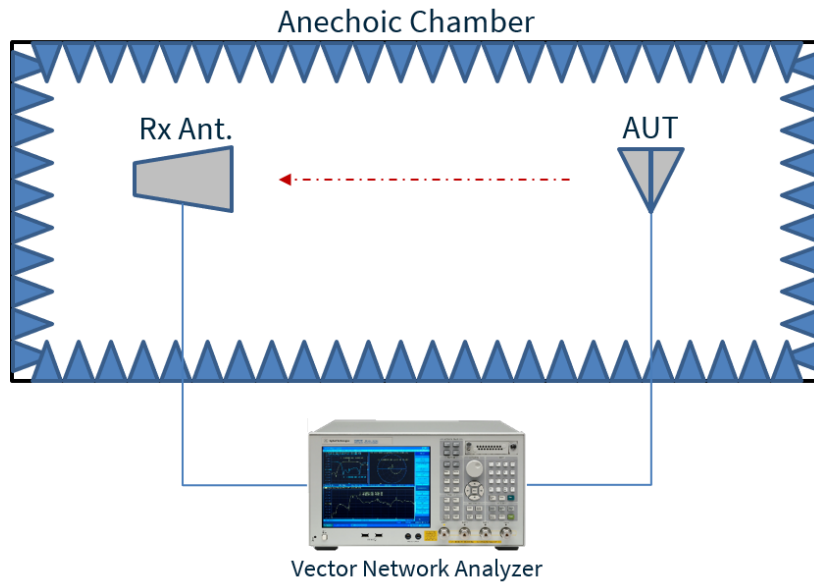


Chamber Test Setup – Tested on 70x70mm Evaluation Board.



5.2 Patterns at 1176 MHz

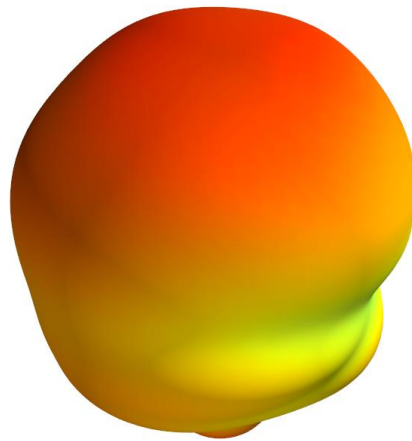



XY Plane XZ Plane YZ Plane

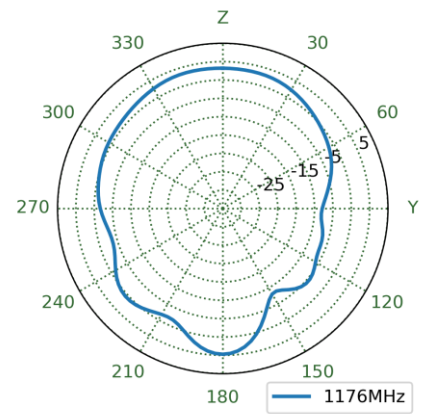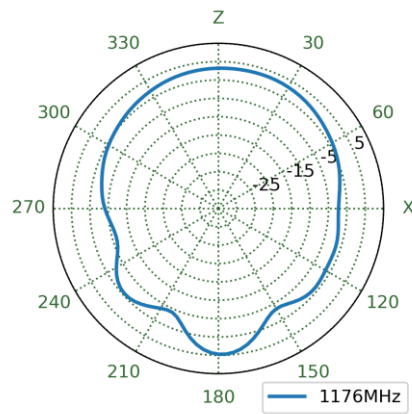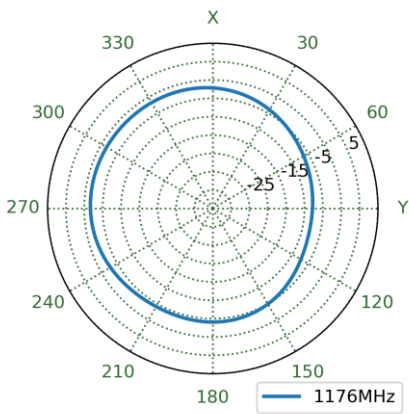



5.3 Patterns at 1525 MHz

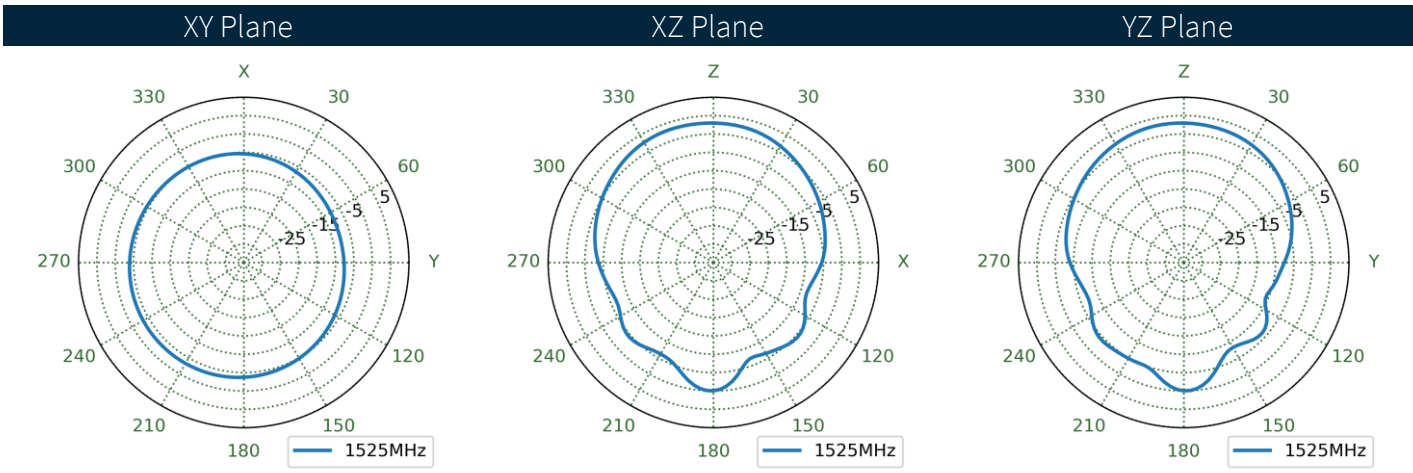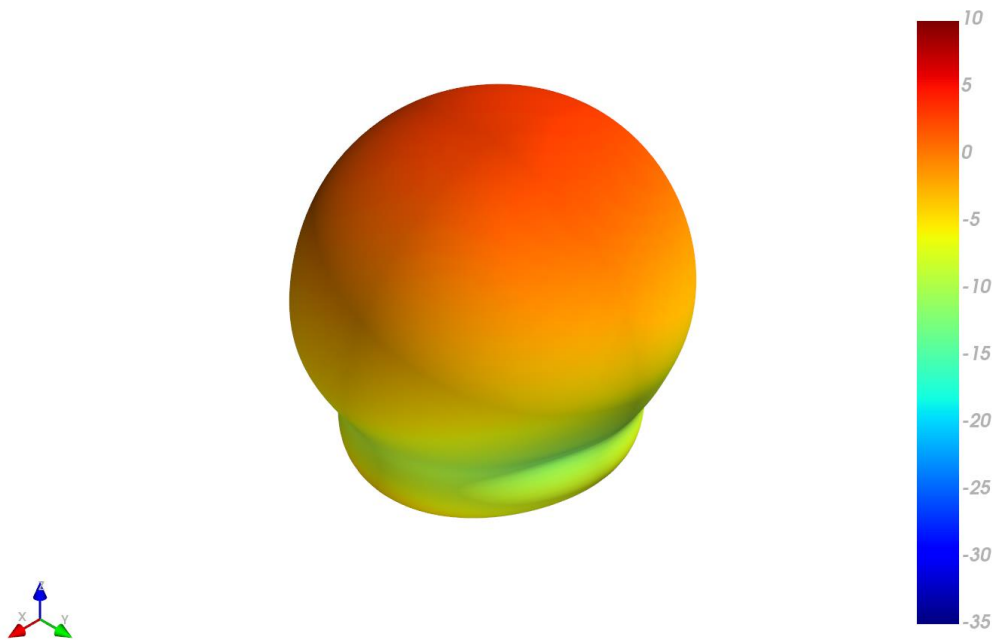



5.4 Patterns at 1561 MHz

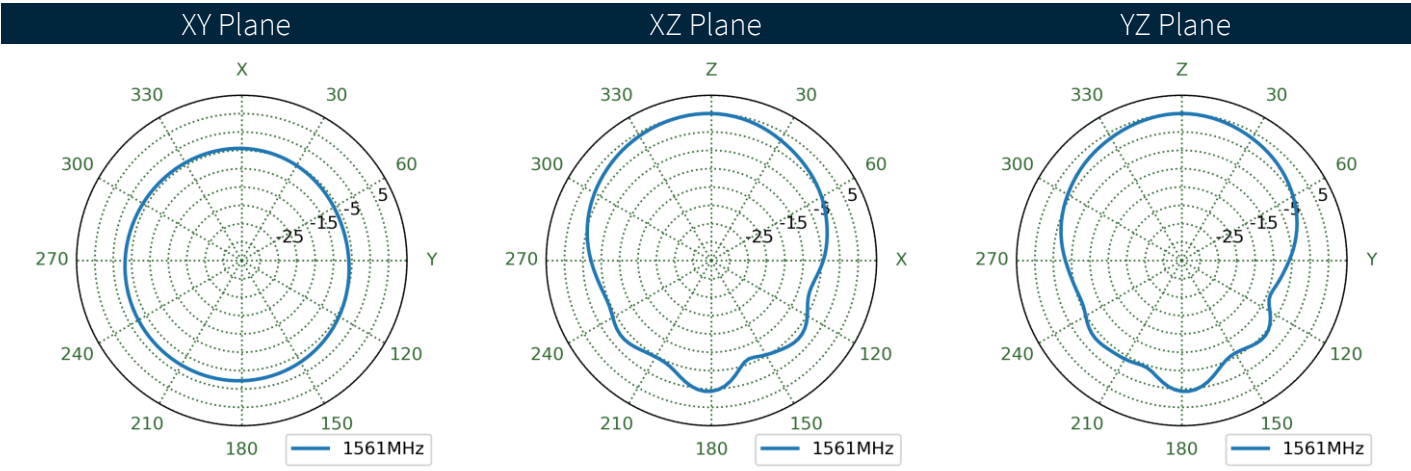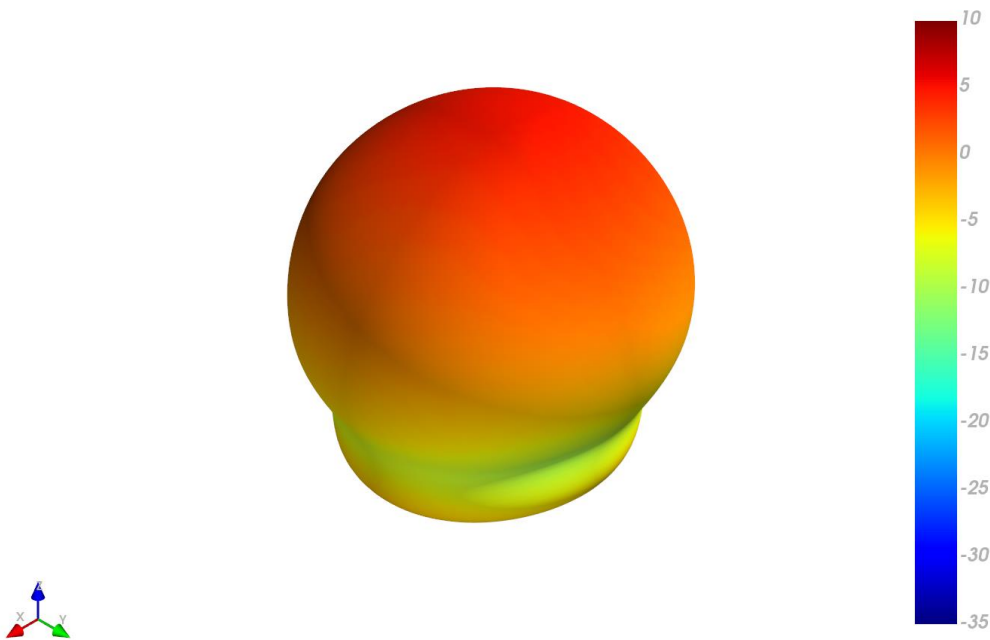

5.5 Patterns at 1575 MHz

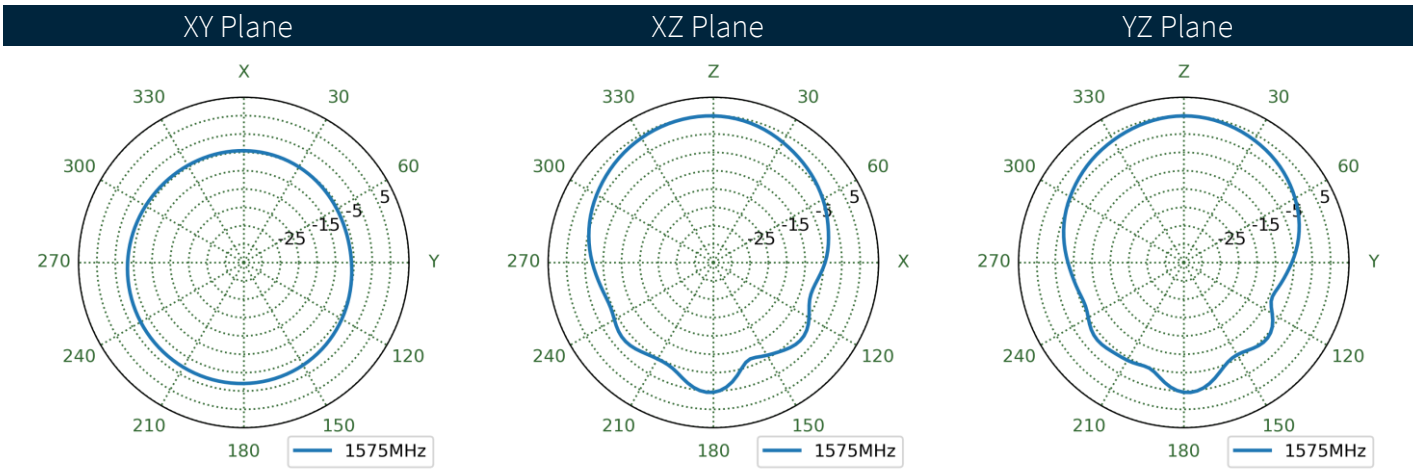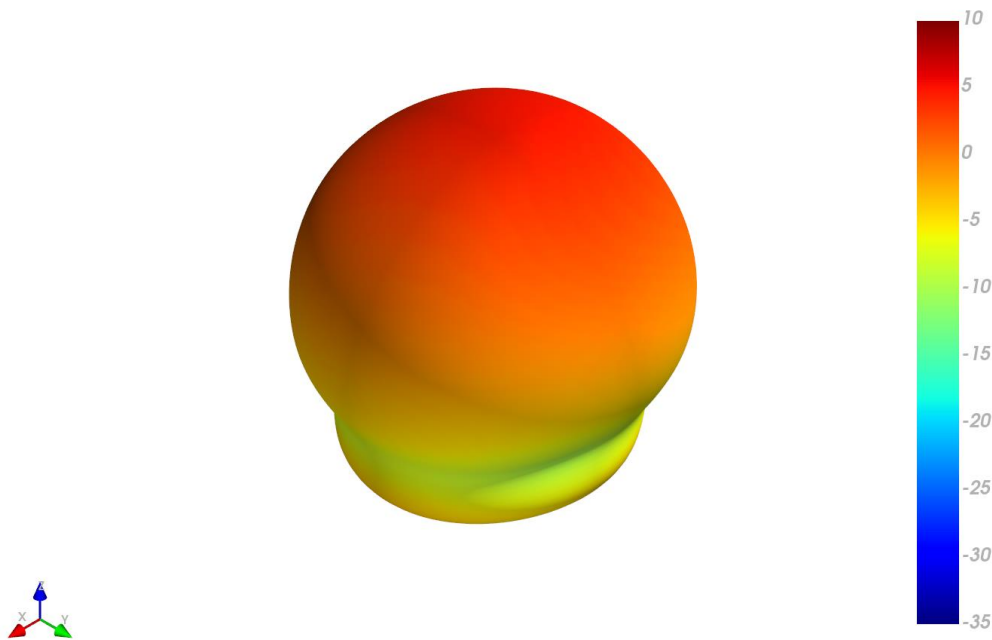


5.6 Patterns at 1602 MHz

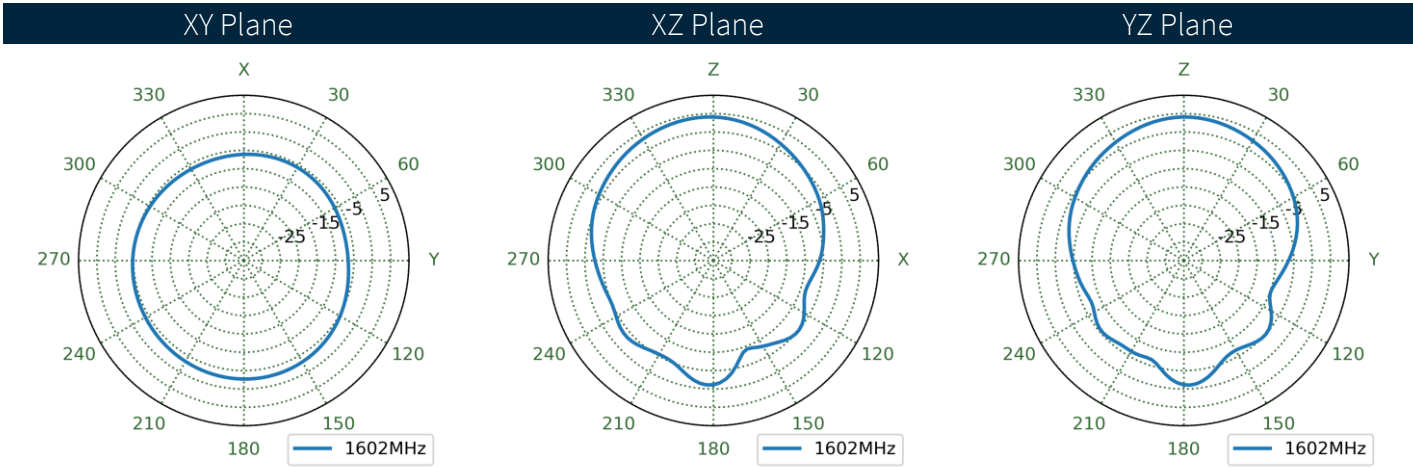
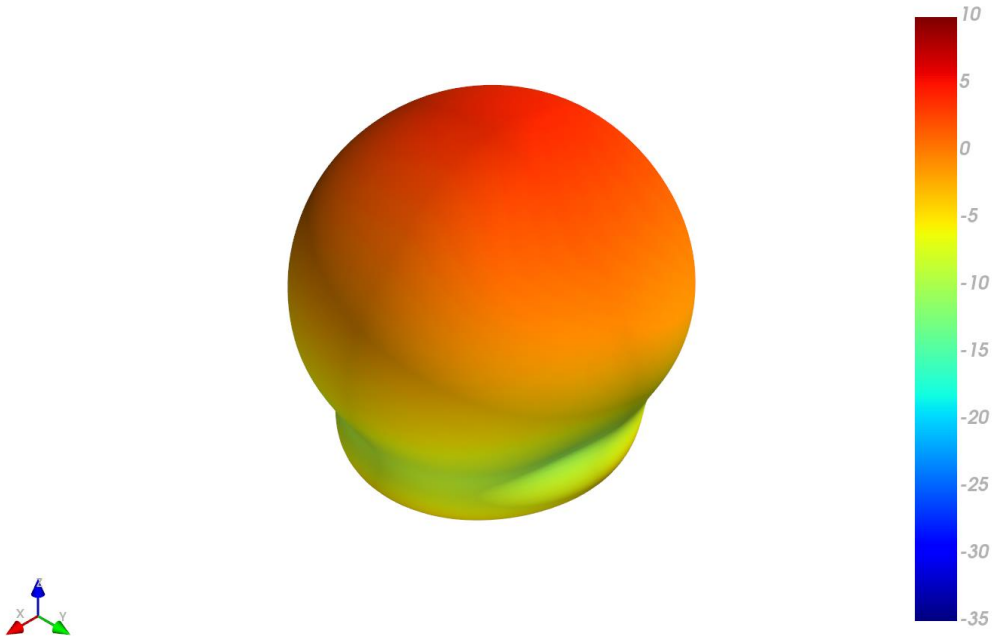


6. LNA Characteristics


6.1 Block Diagram

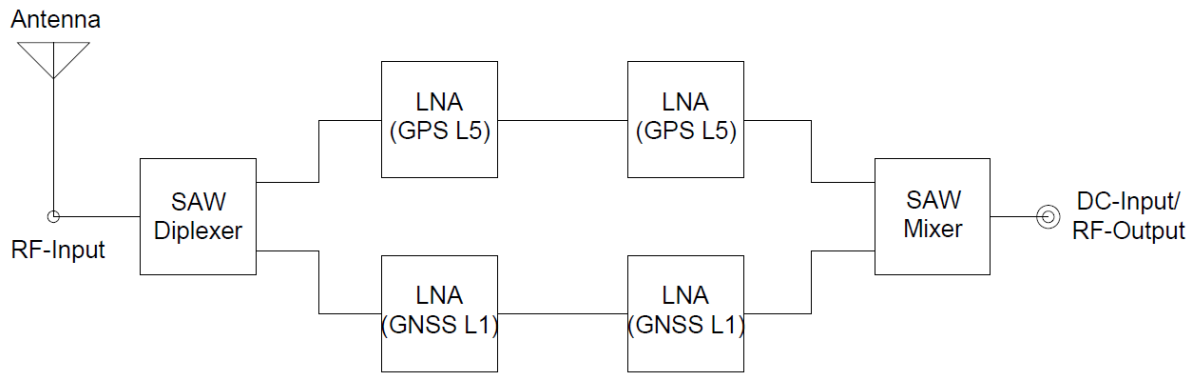


6.2 Noise Figure

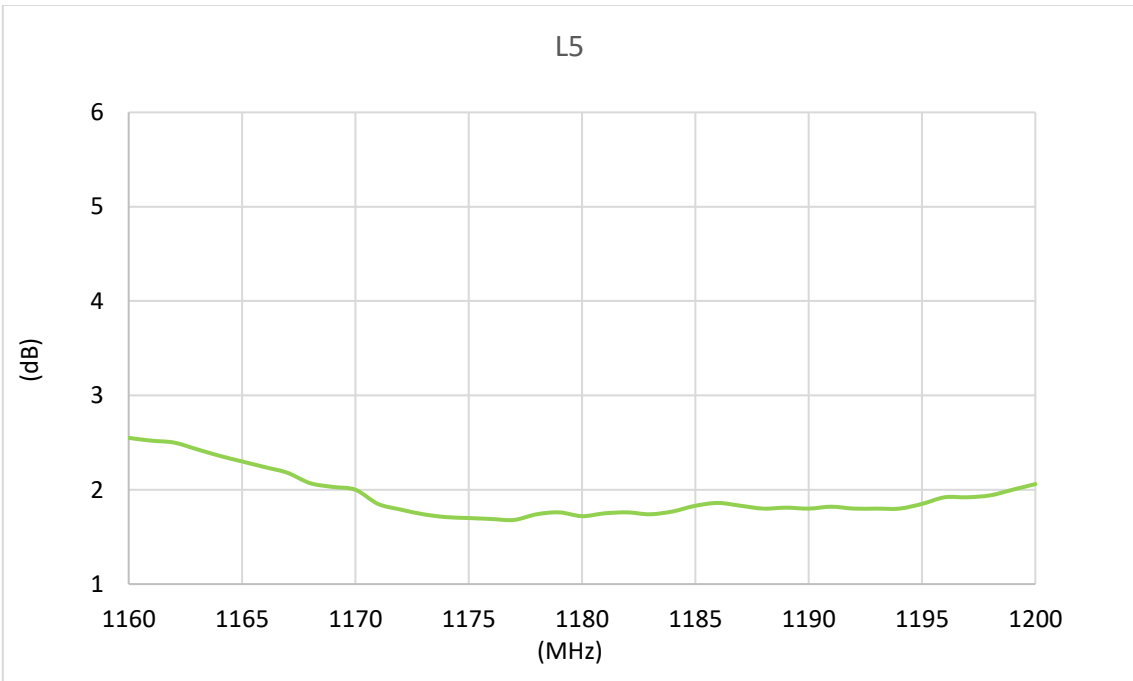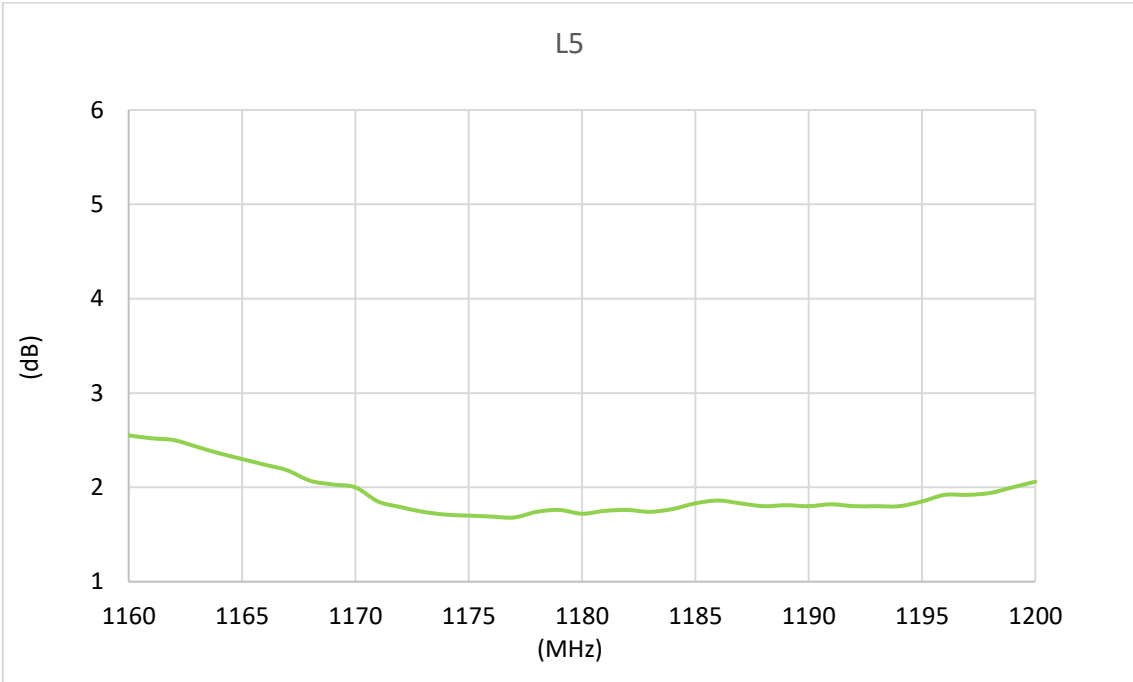



6.3 LNA Gain

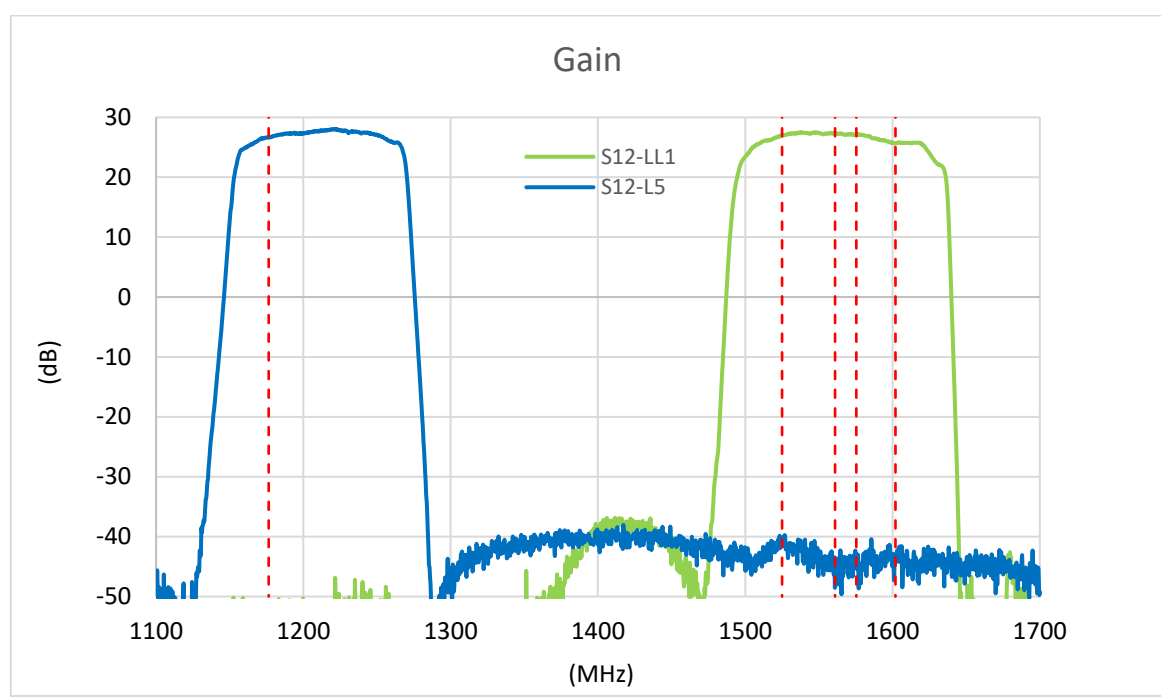

6.4 Out-band rejection

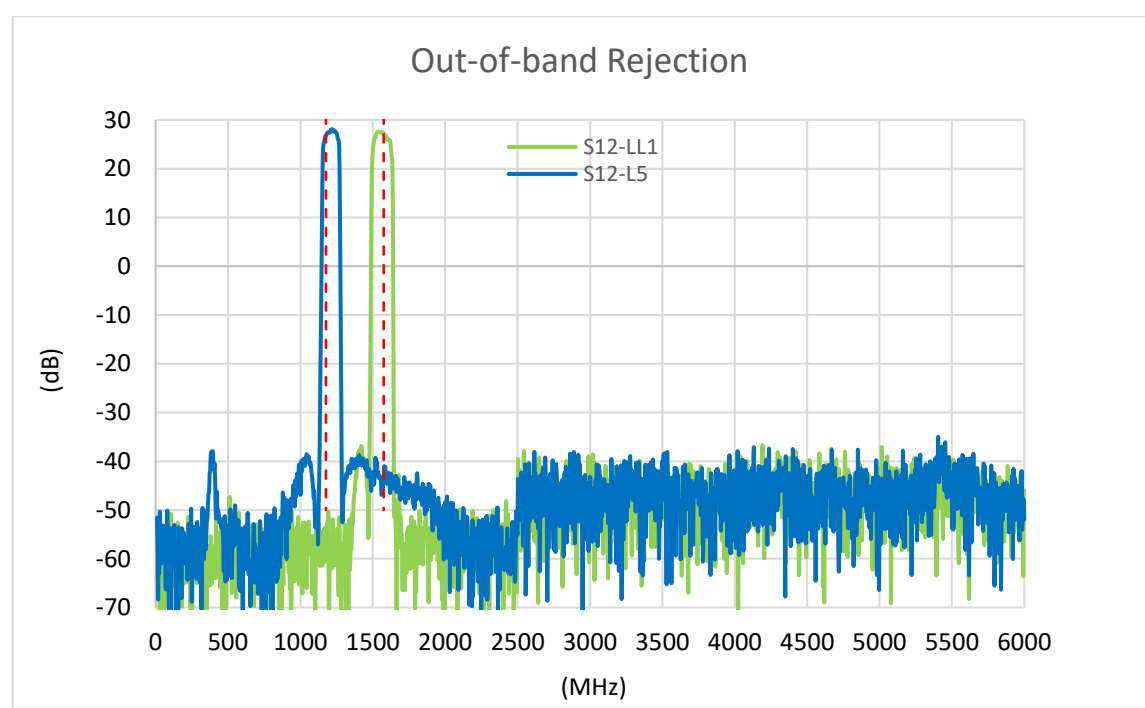

6.5 Group Delay

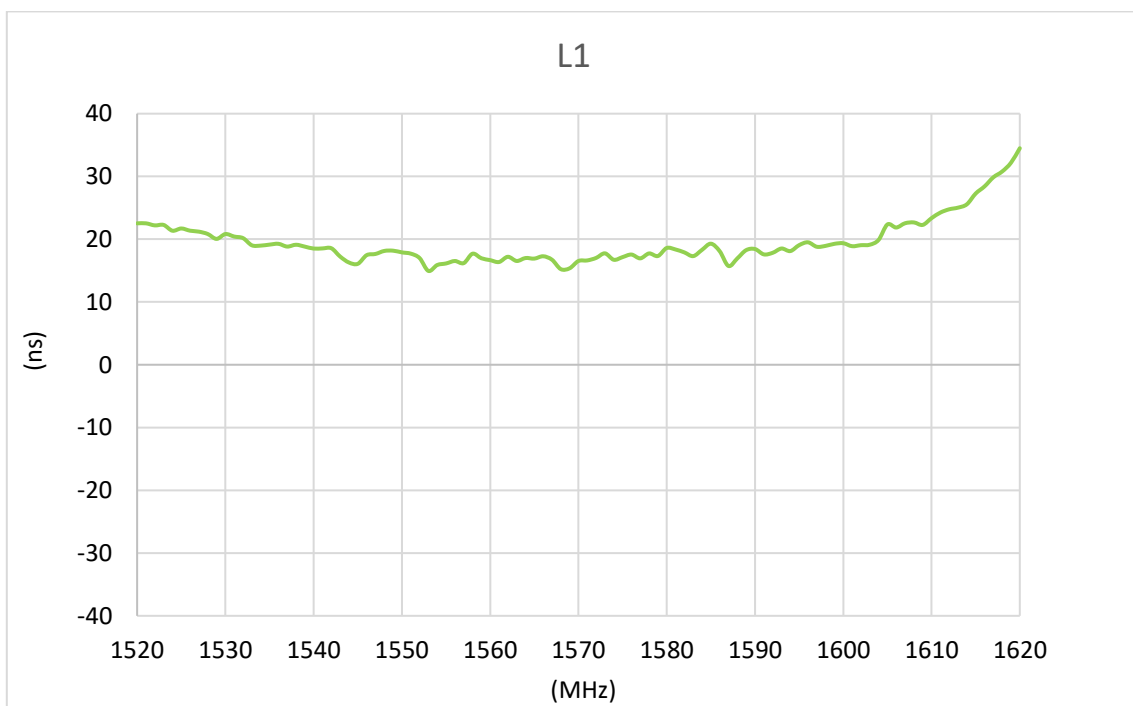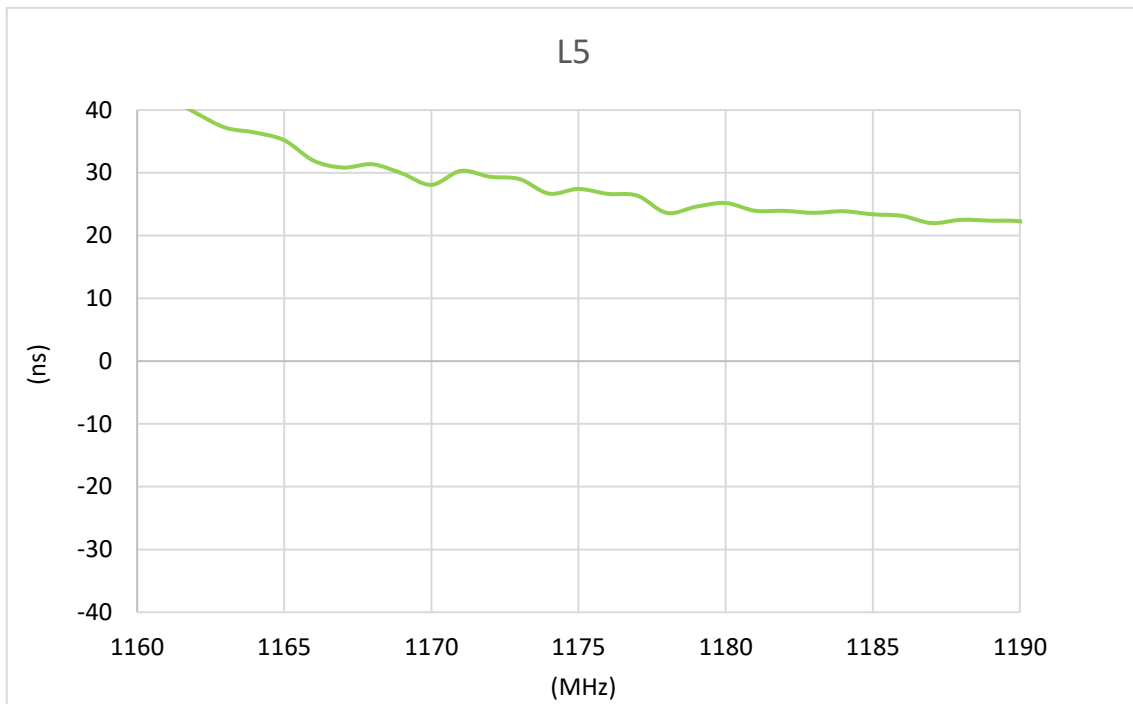

7. Field test Results

7.1 Septentrio AsteRx-U S/N


In this section Taoglas will present the field test result for AHP54510 antenna. The test was performed when the antenna was mounted on a static rooftop test set up in an open sky environment for at least 6 hours. Taoglas will show the field test results using the following receivers:

Receiver: Septentrio AsteRx-U S/N

Receiver Features:

- Multi-band GNSS: 544 channels
- GPS: L1, L5 GLONASS: G1 Galileo: E1, E5a, BeiDou: B1, B2a QZSS: L1, L5 IRNSS: L5 L Band
- SBAS: EGNOS, WAAS, GAGAN, MSAS, SDCM(L1, L5)
- RTK (base and rover), Integrated dual-channel L-band receiver, Support for PPP
- Nav. update rate up to 100 Hz
- Position accuracy = RTK 0.6 cm + 0.5 ppm

| Positioning Accuracy Table (2D Accuracy) | | | |
|--|--------------------|------------|------------------|
| Test Condition | Correction Service | DRMS (68%) | 2DRMS (95-98.2%) |
| Free Space | RTK Disabled | 115 cm | 230 cm |
| | RTK Enabled | 3.92 cm | 7.84 cm |
| 30x30 cm Ground Plane | RTK Disabled | 99 cm | 197 cm |
| | RTK Enabled | 0.98 cm | 1.97 cm |

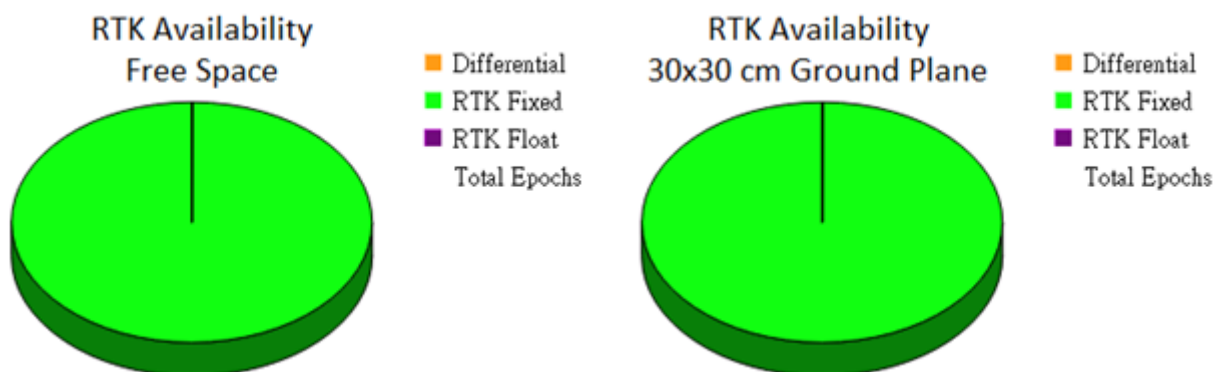

8. Mechanical Drawing

ISO NO.: EDW.001282
STATE: Release
NOTES:

- 1.No dregs or insufficient soldering. Solder thickness 0.3~1.7mm.
- 2.The solder must be smooth and full to the edges of the pad.
- 3.The connector position has special orientation to the PCB as per drawing.
- 4.All material must be RoHS compliant.
- 5.Open/short QC, VSWR required.
- 6.Soldered area.

| REV | ZONE | DESCRIPTION | ENG | APPROVED | DATE |
|-----|------|-------------------|----------|----------|----------|
| DD1 | All | Initial design | Aron Yan | Chozen | 2024/1/5 |
| DD2 | All | Add part markings | Aron Yan | Chozen | 2024/1/8 |

| | Name | Material | Finish | QTY |
|---|--------------------|----------|-----------|-----|
| 1 | Patch | Ceramic | White | 1 |
| 2 | PCB | NP140 11 | Black | 1 |
| 3 | 1-37 Coaxial Cable | FEP | Black | 1 |
| 4 | IPEX MHFH1 | Bronze | Au Plated | 1 |
| 5 | Shielding Case | SPTE | Sn Plated | 1 |


| | |
|---|---|
| APPROVED BY: Chozen | <small>TW Design Center This drawing is Taoglas Intellectual Property and is intended only for use as an assembly of Taoglas. This is not to be copied or shared with third parties without the prior written consent of Taoglas.</small> |
| CHECK BY: Aaron | |
| DRAWN BY: Aron Yan | |
| DATE: 2024/1/5 | TITLE: GNSS L1,L5 L-Band Dual Feed Stacked 45*45*10mm Patch 1-PEX MHFH1 100mm 1.37 |
| UNLESS OTHERWISE SPECIFIED TOLERANCES ON: XX±0.05 X±0.1 XX±0.1 XXX±0.25 | PART NO.: AHP54510.07.0100C |
| THIRD ANGLE PROJECTION | UNIT: mm SCALE: 1:1.5 PAGES: 1/1 REV: D02 |

9. Packaging

1 PCS AHP54510 per PE Bag



60pcs AHP54510 per Carton
Dimensions: 390x320x290 mm

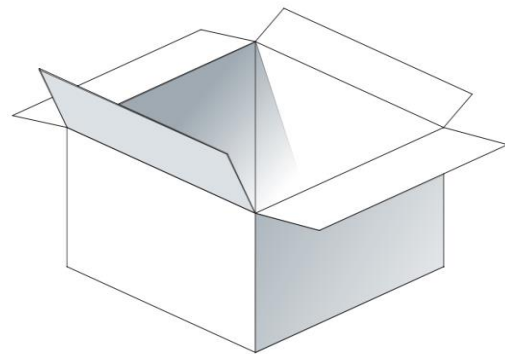

Changelog for the datasheet

SPE-24-8-007– AHP54510.07.0100C

Revision: A (Original First Release)

| | |
|---------|-----------------|
| Date: | 2024-01-12 |
| Notes: | Initial Release |
| Author: | Cesar Sousa |

Previous Revisions

| | |
|--|--|
| | |
| | |
| | |
| | |
| | |



www.taoglas.com

