



TAOGLAS®



Datasheet

Part No:
FG.26.A

Description

Super Compact 7dBi 2.4GHz Directional Panel Antenna
300mm of RG-58 Pigtail with N Type Male Connector

Features:

Super Compact, High-Gain Panel Antenna
2.4GHz Coverage
7dBi Peak Gain
Multiple Mounting Options
IP65 Rated Enclosure
Cable: 300mm of RG-58
Connector: N-Type (Male)
Dimensions: 122 x 122 x 47mm
RoHS & Reach Compliant

| | | |
|-----------|--------------------------------|-----------|
| 1. | Introduction | 3 |
| 2. | Specification | 4 |
| 3. | Mechanical Drawing | 5 |
| 4. | Installation Guide | 6 |
| 5. | Packaging | 7 |
| 6. | Antenna Characteristics | 9 |
| 7. | Radiation Patterns | 13 |
| <hr/> | | |
| | Changelog | 16 |

Ireland & USA
ISO 9001:2015
Certified



Taiwan
ISO 9001:2015
Certified



Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

1. Introduction



The Taoglas **FG.2x Series** of compact 2.4GHz Panel antennas are specially designed to provide directional wireless communication. The panel design combines a sleek, low-profile design with high-performance, delivering superior performance characteristics. Focused on high-performance signal transmission and reception, they are perfect for applications requiring long range, faster data rates and more resilient connections. The FG.26 offers a peak gain of up to 7dBi and the FG.27 reaches up to 12dBi, both with great efficiency of over 60%.

Typical Applications Include:

- Point to Point and Point to Multipoint Wireless Networks
- In-building and Backhaul Networks
- Long Range Wi-Fi® Coverage for Smart City Applications
- Wireless Surveillance Systems
- Wi-Fi® Hotspot Expansion, e.g. Factories and Dockyards

The IP65 waterproof rated antenna enclosure is made from UV resistant ABS making it ideal for use in challenging environments and wide temperature ranges. It is supplied with a mounting bracket that allows for positional tilt and swivel to optimise the directionality of the antenna. The FG Series is supplied with RG-58 cable and N-Type connectors as standard, both of which can be fully customised to suit your requirements pending MOQ.

For further information or samples, please contact your regional Taoglas customer support team.

2. Specification

Wi-Fi/BT/ISM Electrical

| Band | Frequency (MHz) | Efficiency (%) | Average Gain (dB) | Peak Gain (dBi) | HPBW (degrees) | FtB Ratio (dB) | SLL (dB) | Impedance | Polarization | Radiation Pattern | Max. input power |
|--------------|-----------------|----------------|-------------------|-----------------|----------------|----------------|----------|-------------|--------------|-------------------|------------------|
| Wi-Fi 2.4GHz | 2400-2500 | 62.9 | -2.01 | 7.05 | > 65 (H & V) | 15 max. | 14 max. | 50 Ω | Linear | Directional | 10W |


Mechanical

| | |
|------------|------------------|
| Dimensions | 122 x 122 x 47mm |
| Material | ABS PA-777B+UV |
| Connector | N Type (M) |
| Cable | 300mm of RG-58 |

Environmental


| | |
|-----------------------|----------------------------|
| Operation Temperature | -40°C to 85°C |
| Storage Temperature | -40°C to 85°C |
| Waterproof | IP65 |
| Relative Humidity | Non-condensing 65°C 95% RH |

3. Mechanical Drawing

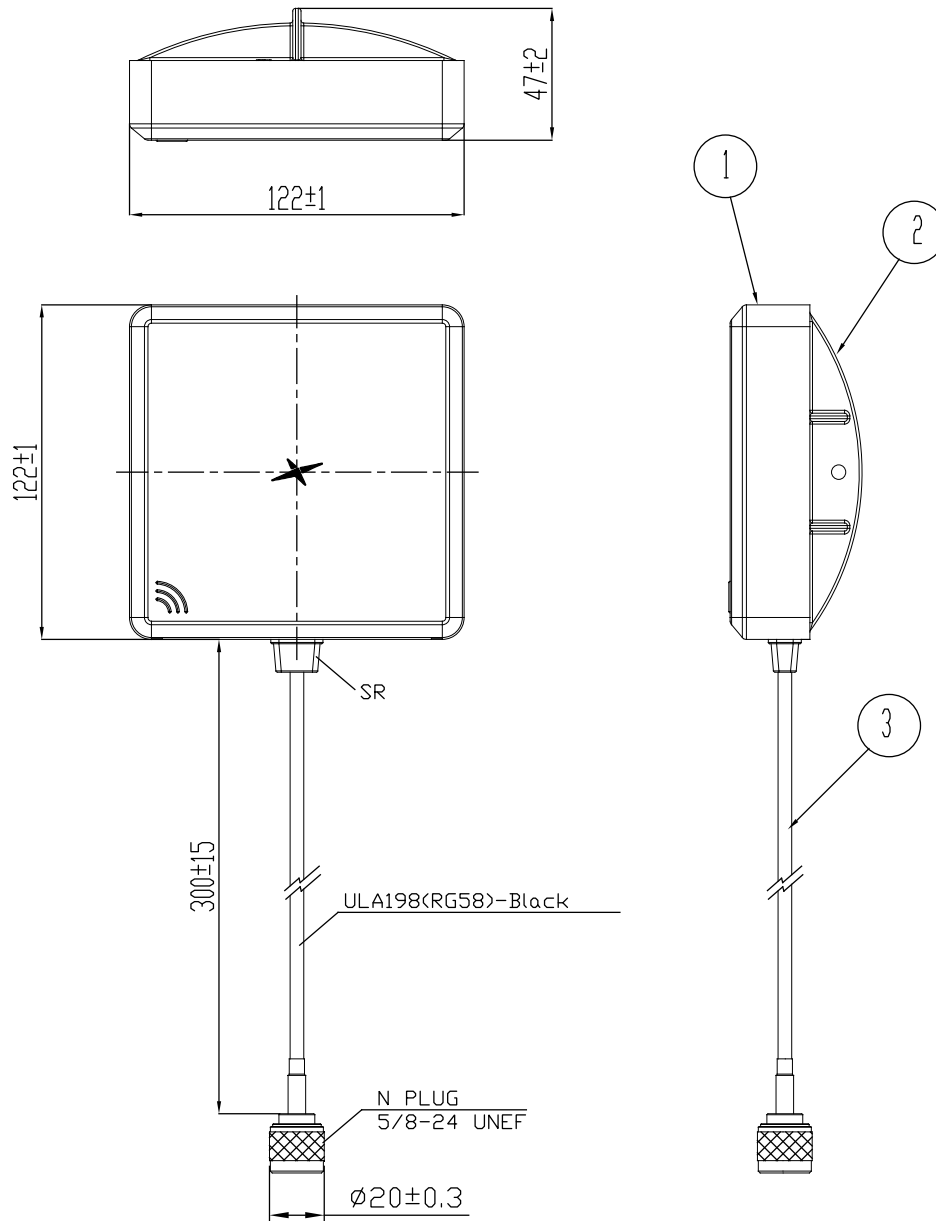


| | Name | Material | Finish | QTY |
|---|-------------------------------|------------------------|--------|-----|
| 1 | Front Cover | ABS PA-77/8HV | Black | 1 |
| 2 | Rear Cover | ABS PA-77/8HV | Black | 1 |
| 3 | Cable ASSY (Ø-N Plug)SR 300mm | ULA198 RG58Black Cable | Black | 1 |

4. Installation Guide

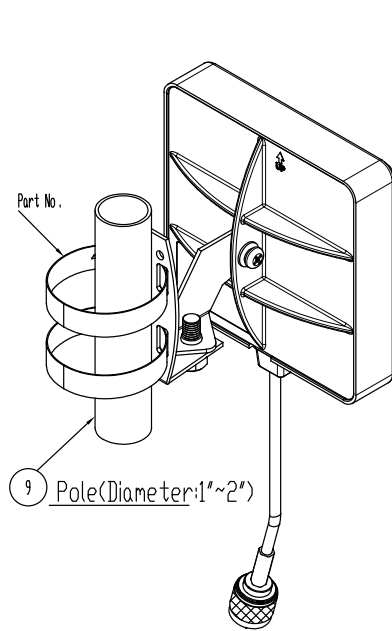

POLE MOUNT

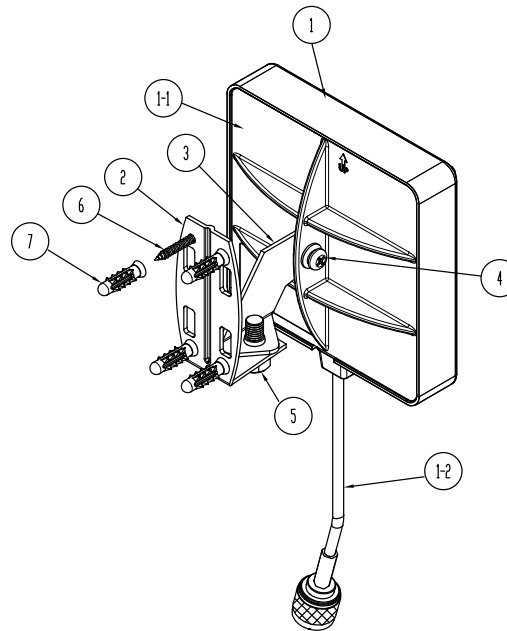


WALL MOUNT

| | | | |
|------|----------|---|------|
| ⑤ | | MB-12.9x20mm(screw) MB-Ø12.2x1.5mm(s/w) MB-Ø12.5x1.5mm(w) | 1set |
| ④ | | M5-Ø10x11.5MM | 1pc |
| ③ | | 26(w)x5(t)mm | 1pc |
| ② | | 80x40x40mm | 1pc |
| ⑧ | | 2-1/2"(40~63mm) 12.7(w)x0.6(t)mm | 2pcs |
| ⑦ | | Ø8x25mm | 4pcs |
| ⑥ | | TH5/32"-16#3/4" (Ø9x19mm) | 4pcs |
| ITEM | Graphics | Size(LxWxH) | Q'TY |


| | | | |
|------|---------------------------------|-----------------|------|
| ⑧ | Hose Clamp 2-1/2"(40~63mm) | SUS304 | 2 |
| ⑥ | Anchor | PP | 4 |
| | TH5/32"-16#3/4"TP-A screw | SUS302 | 4 |
| ⑤ | MB S/W | SUS304 | 2 |
| | MB W | SUS304 | 1 |
| ④ | XH MB-12.90#20mm screw | SUS304 | 4 |
| | BH M5 (S/W+W) Screw | SUS302HQ | 4 |
| ③ | Mounting Adaptor | SUS304 | 4 |
| ② | L Type Mounting | SUS430 | 1 |
| ①-3 | Antenna Body-Cable Assy(N Plug) | ULAI98RCSBBlack | 1 |
| ①-2 | Antenna Body-Rear Cover | ABS PA-777#HV | 1 |
| ① | Antenna Body-Front Cover | ABS PA-777#HV | 1 |
| ITEM | DESCRIPTION | MATERIAL | Q'TY |

5. Packaging


1 Pcs per PE bag

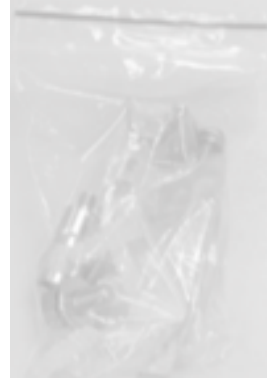

1 pcs per zipper bag

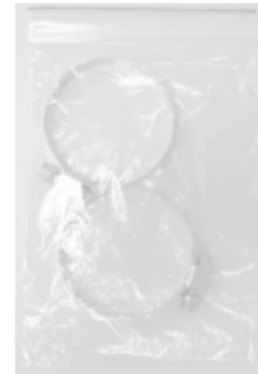

1pcs per box
 Box dimensions: 180 x 70 x 145mm
 Weight: 0.44Kg

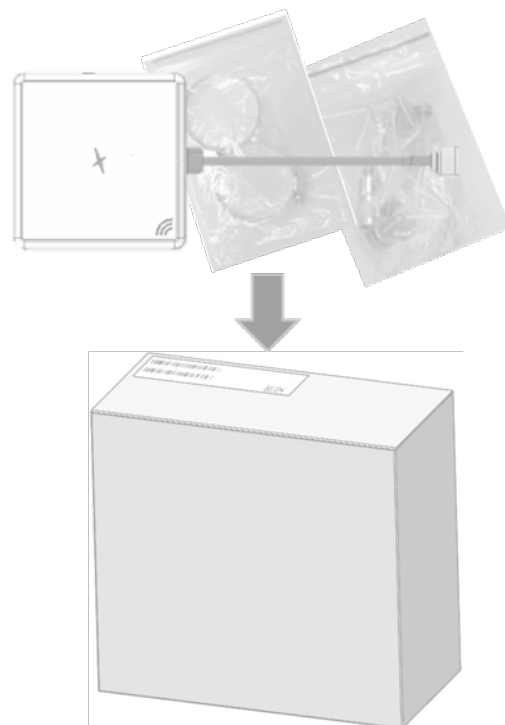

20pcs per carton
Carton dimensions: 380 x 376 x 320mm
Weight: 9.7Kg




6. Antenna Characteristics

6.1 Test Setup

AUT




Vector Network Analyzer

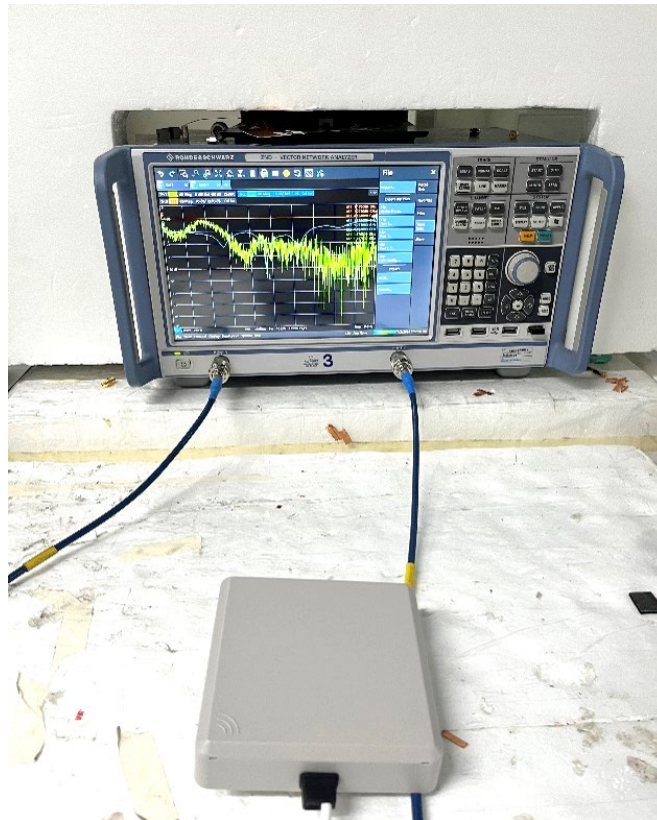


VNA Setup


6.2 Return Loss

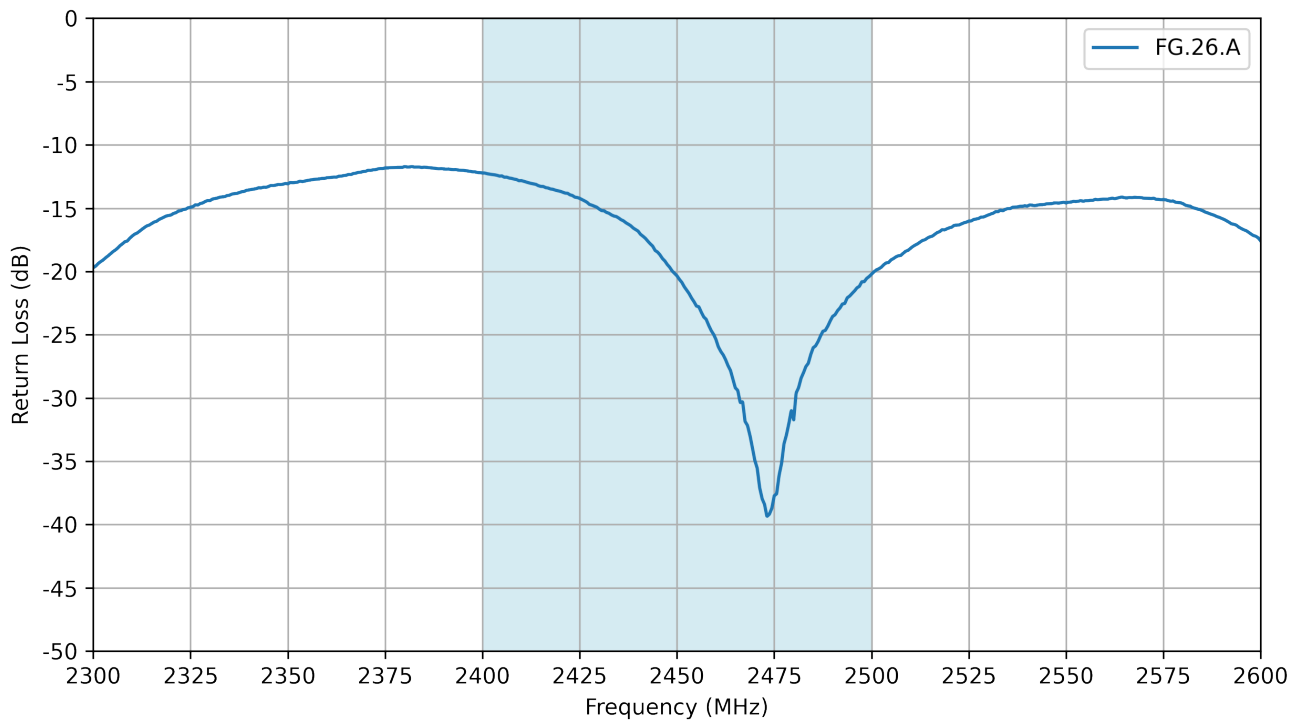


6.3 VSWR

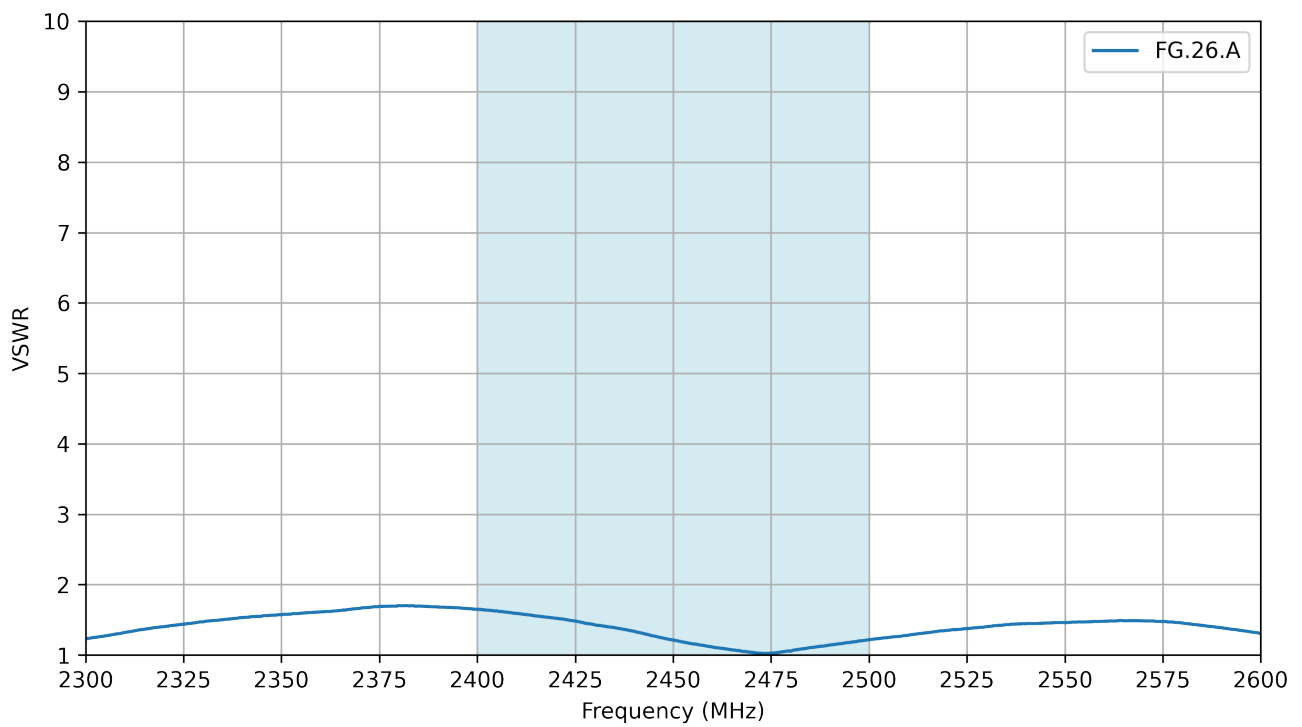


6.4 Efficiency

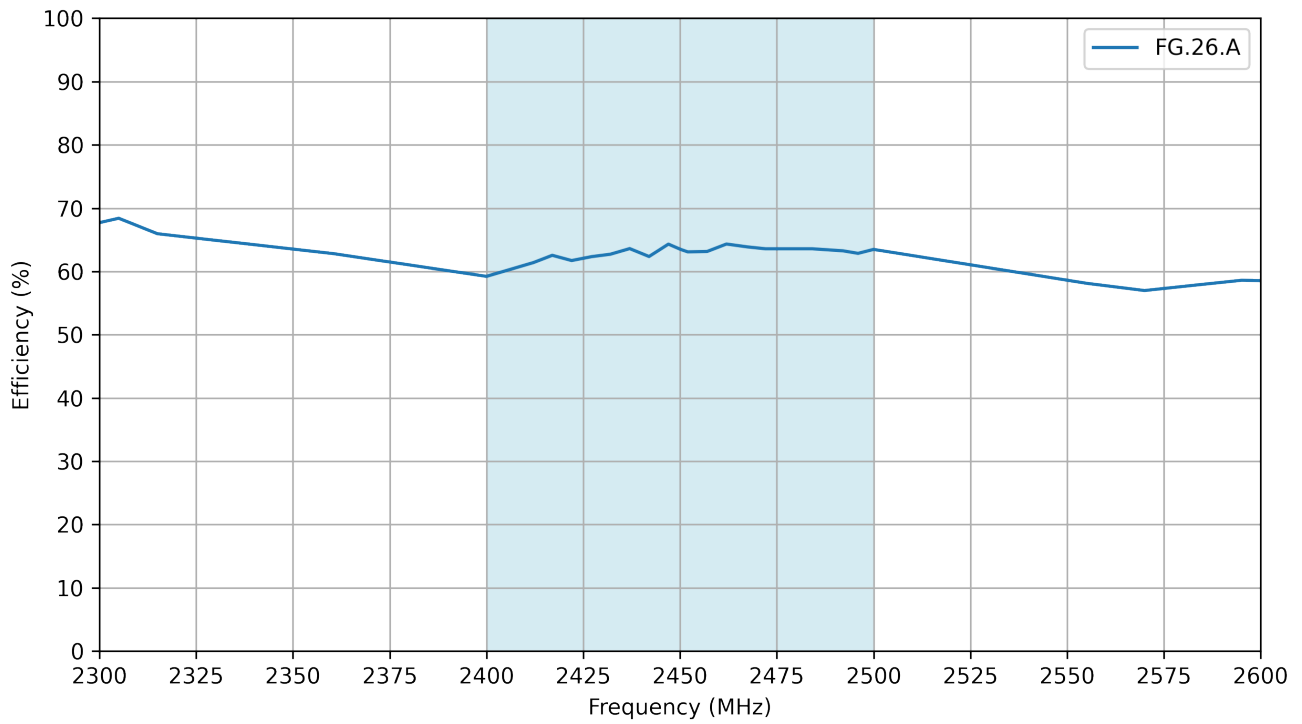

6.5 Average Gain


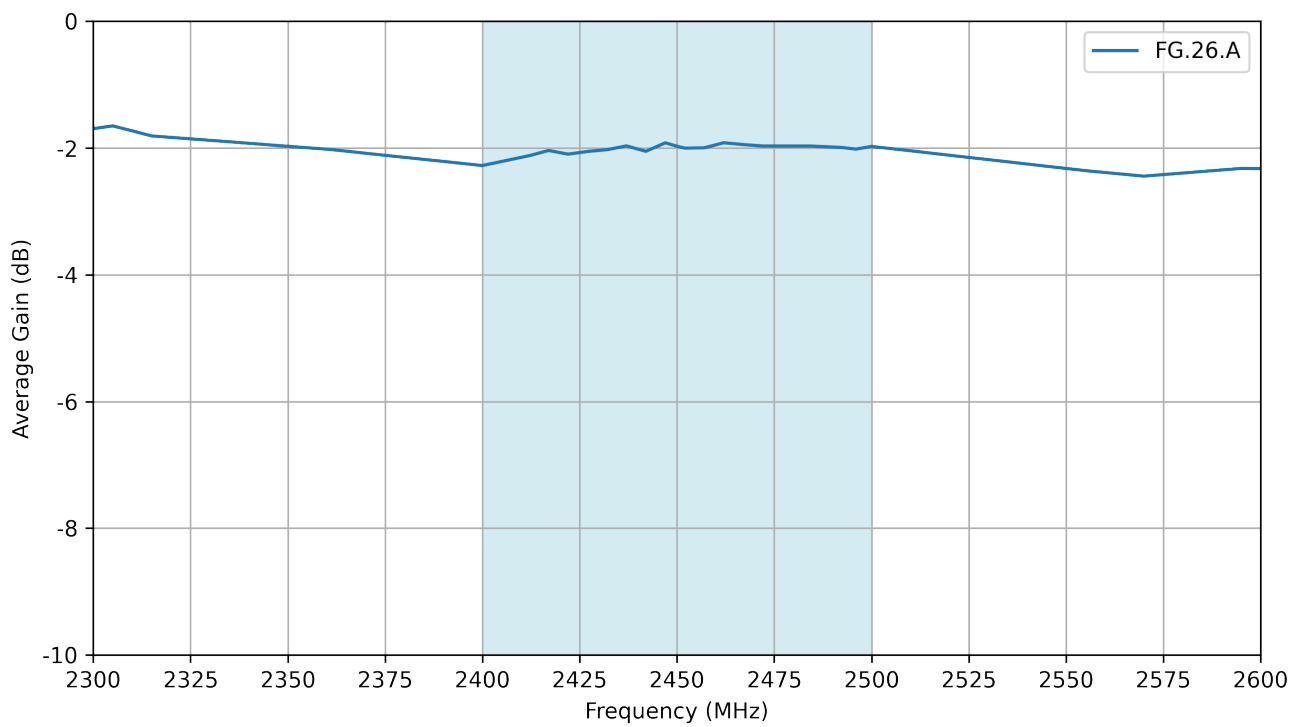


6.6 Peak Gain

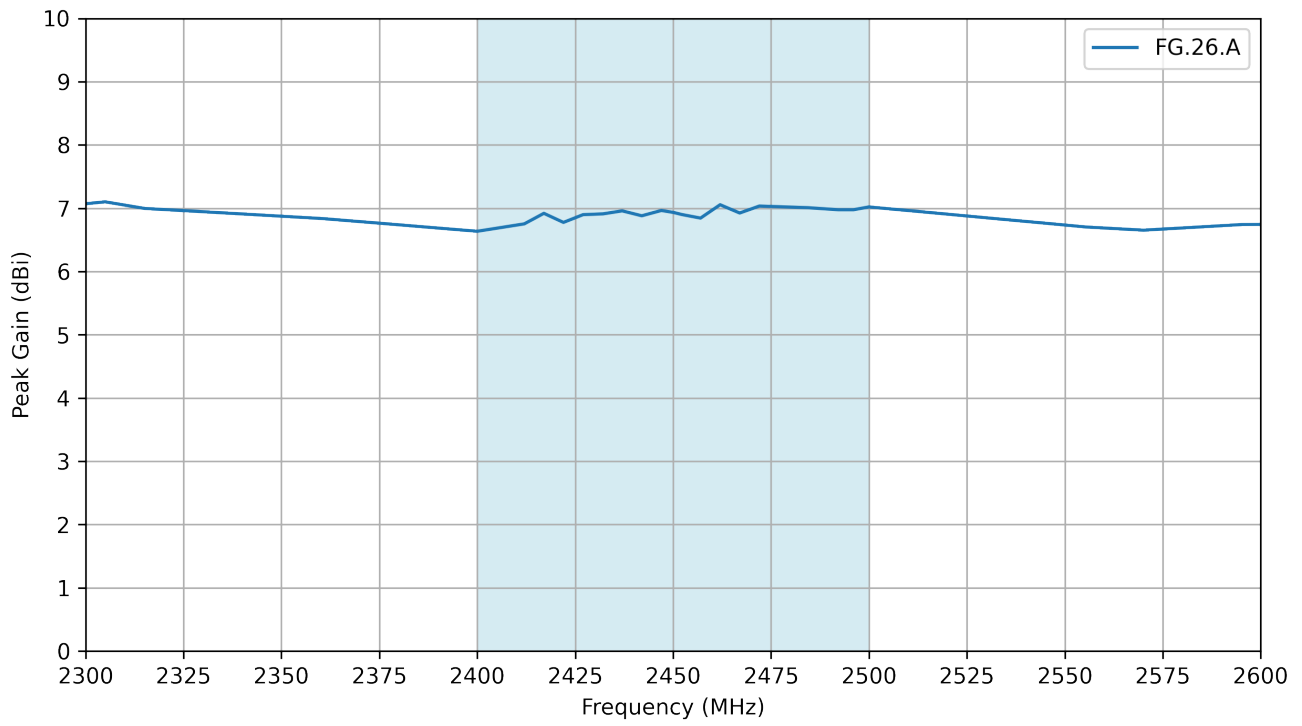



7. Radiation Patterns

7.1 Test Setup

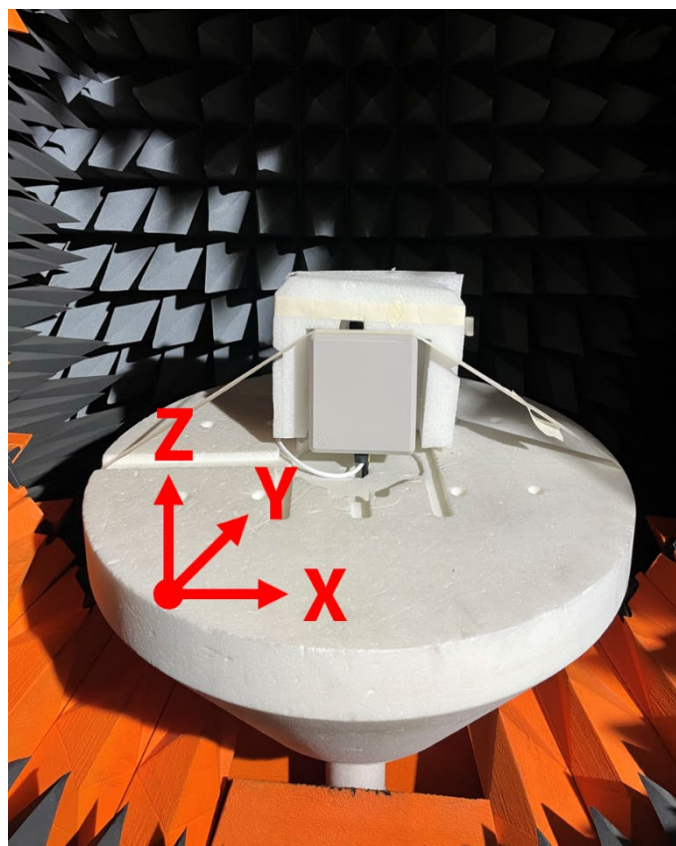
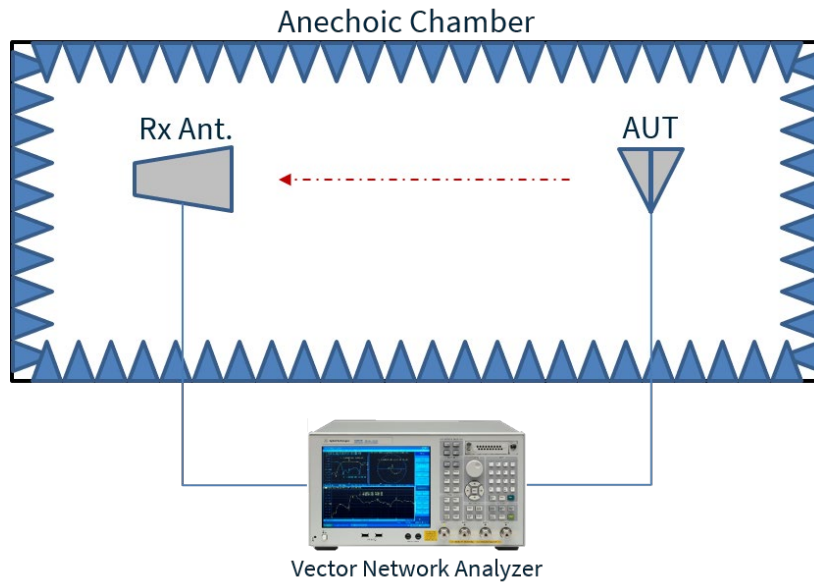


VNA Setup



7.2 Patterns at 2400 MHz

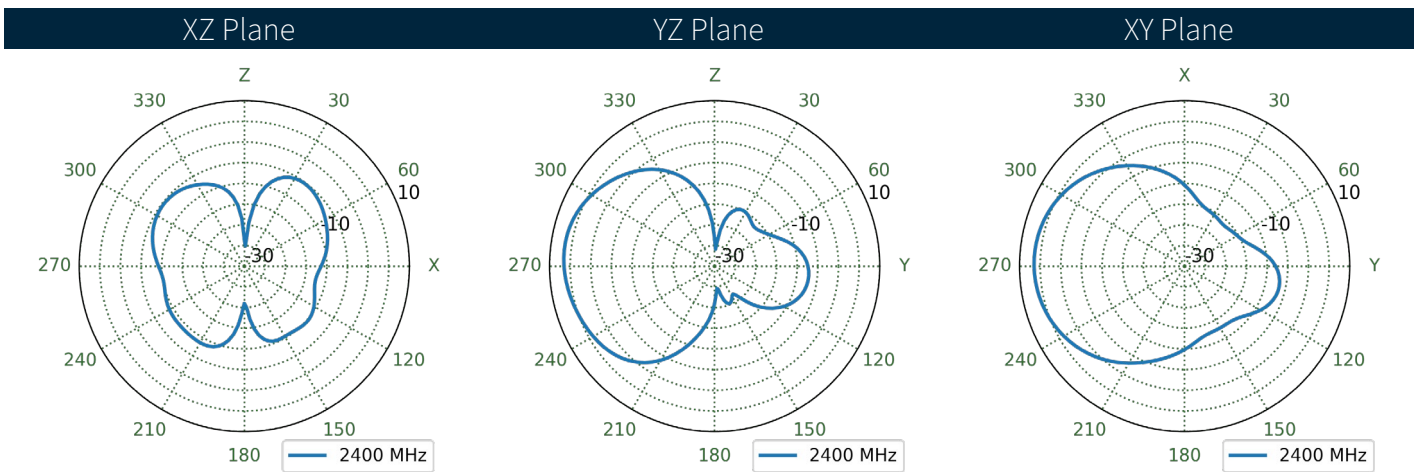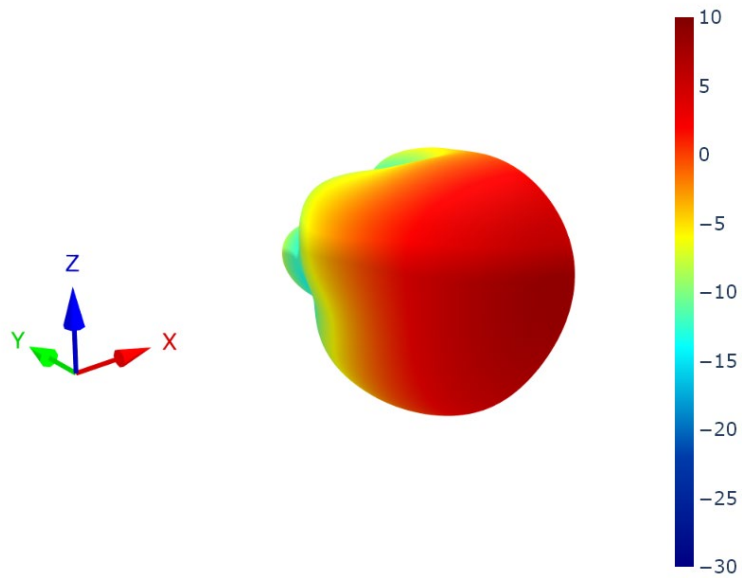

7.3 Patterns at 2450 MHz

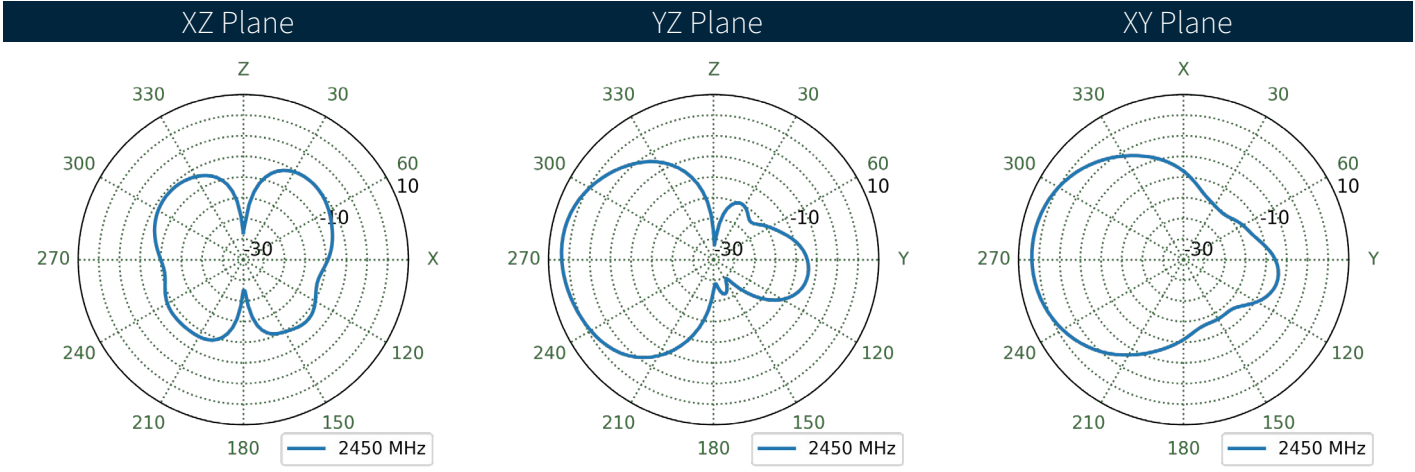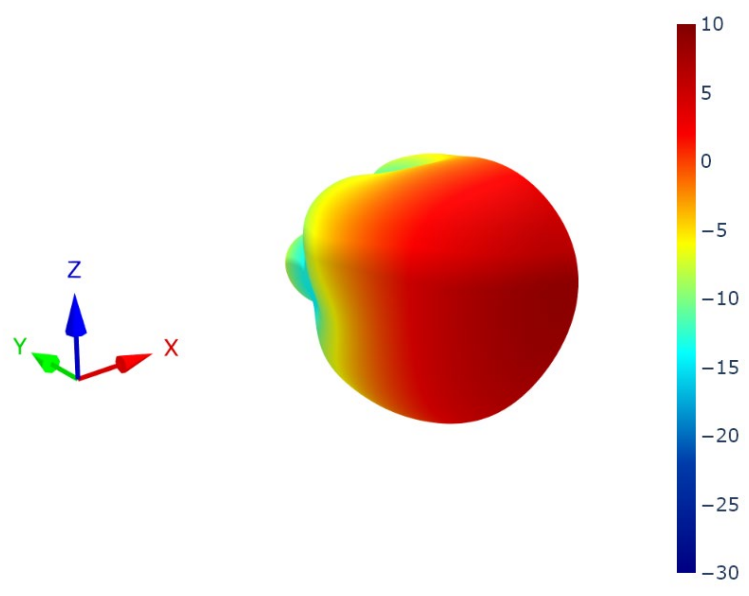

7.4 Patterns at 2500 MHz

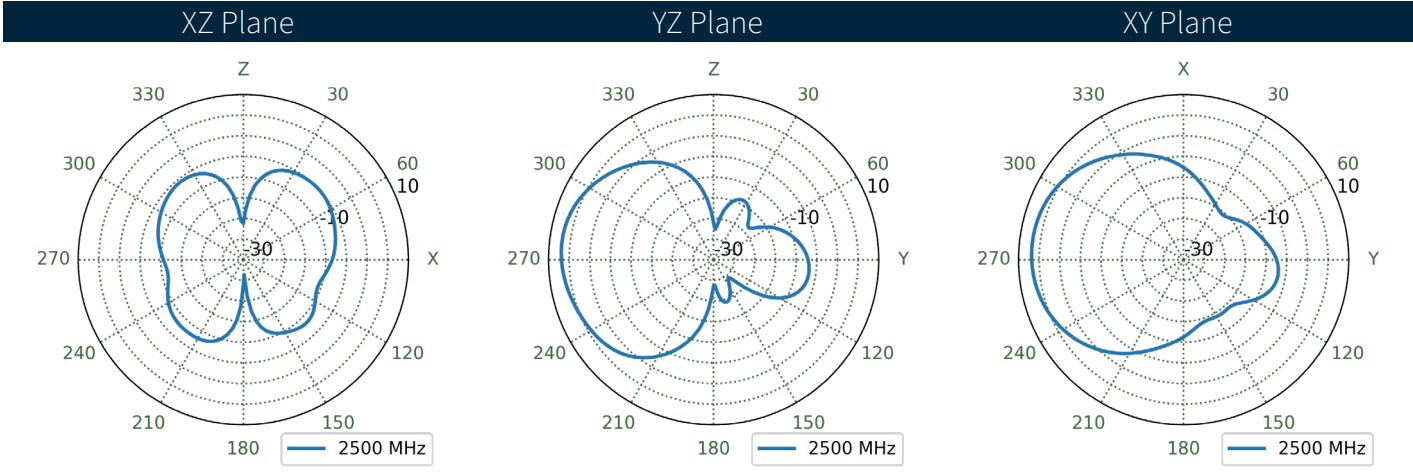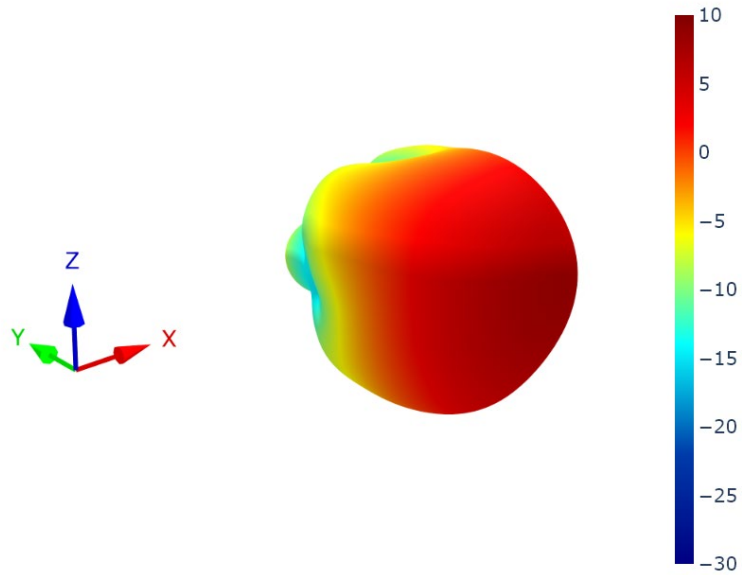

Changelog for the datasheet

SPE-24-8-242 – FG.26.A

Revision: A (Initial Release)

Date: 2024-09-26

Notes: Initial Datasheet Release

Author: Gary West

Previous Revisions

| | |
|--|--|
| | |
| | |
| | |
| | |
| | |



www.taoglas.com

