




TAOGLAS®

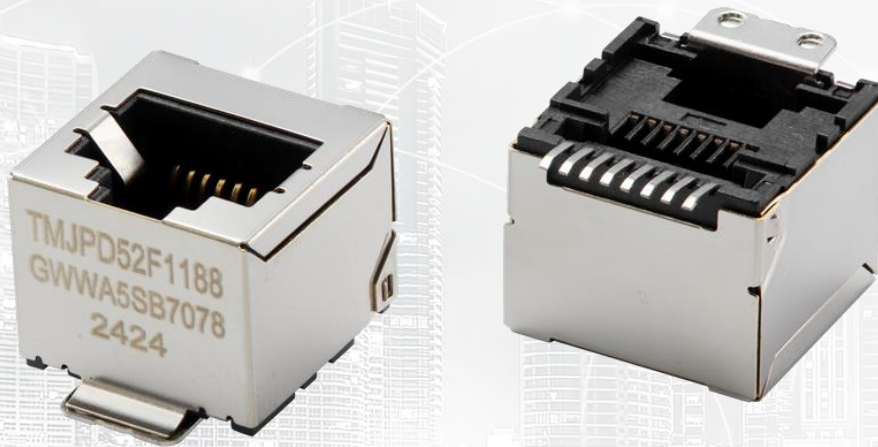

Datasheet

RJ45 Modular Jack 8P8C Cat5E Vertical SMT

Part No:
TMJPD52F1188GWWA5SB7078

Description:
1G Base-T Single Port RJ45 without magnetics.
8p8c Vertical with SMT mount

Features:
Shielded
Vertical
SMT
Industrial grade

1. Specifications	3
2. Mechanical	4
3. Electrical	5
4. Packaging	6
<hr/>	
Changelog	7

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.



1. Specifications

Electrical Specifications	
Voltage	125 VAC RMS
Current Rating	1.5 AMP
Dielectric Strength	1000 VAC Rms 50hz or 60hz,1min.
Insulation Resistance	500 Mega Ohms Min. Initial After 500v Dc For 1 Minute
Contact Resistance	Single Terminal 30 Milli Ohms Max. Initial 50 Milli Ohms Max. After Durability Test


Mechanical Specifications	
Durability	750 Cycles Min,12.5mm/Minute
Insertion Force	2.2kg.F Max.
Retention Strength	7.7kg.F Between Jack and Plug

Material Specifications	
Housing	PA9T, UL94V-0, Black
Terminal	Phosphor Bronze $\varnothing=0.35\text{mm}$, 50 μ " Gold Plating on Contact Area
Shield	C2680, T=0.20mm, 20 μ " Min Nickel Plating on All Area.

Environmental Specifications	
Operating Temperature	-40°C TO +85°C
Storage Temperature	-40°C TO +85°C

2. Mechanical


2.1 Mechanical Drawings

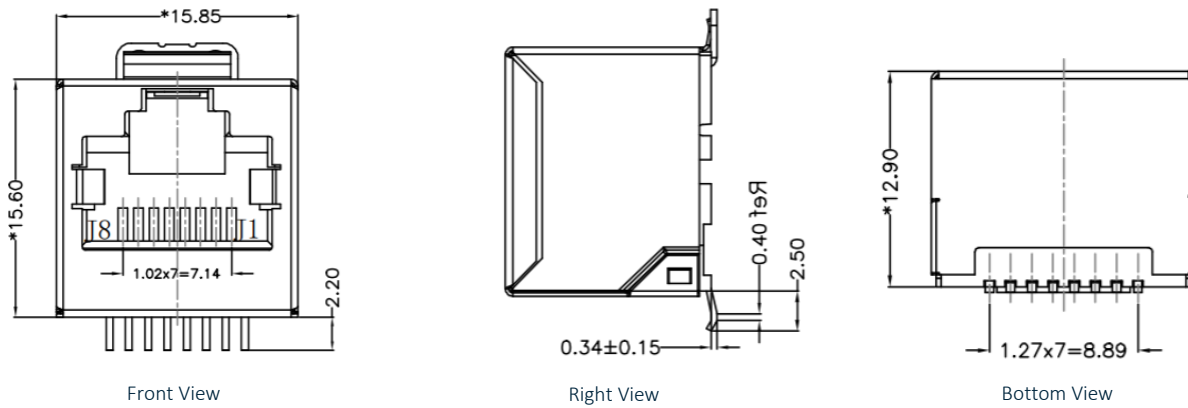

Mechanical Specifications	
Height	12.90 mm
Width	15.85 mm
Depth	15.60 mm
Weight	g
Mounting Style	SMT
Mounting Angle	Vertical

Dimensions are in millimeters with the following tolerances: X.XX = ± 0.25

2.2 PCB Layout

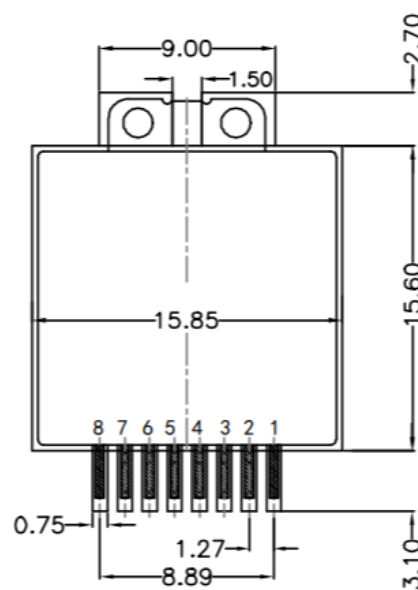


Suggested PCB Layout (Top View)

Dimensions are in millimeters with the following tolerances: X.XX = ± 0.10

3. Electrical

3.1 Profile of Wave Solder

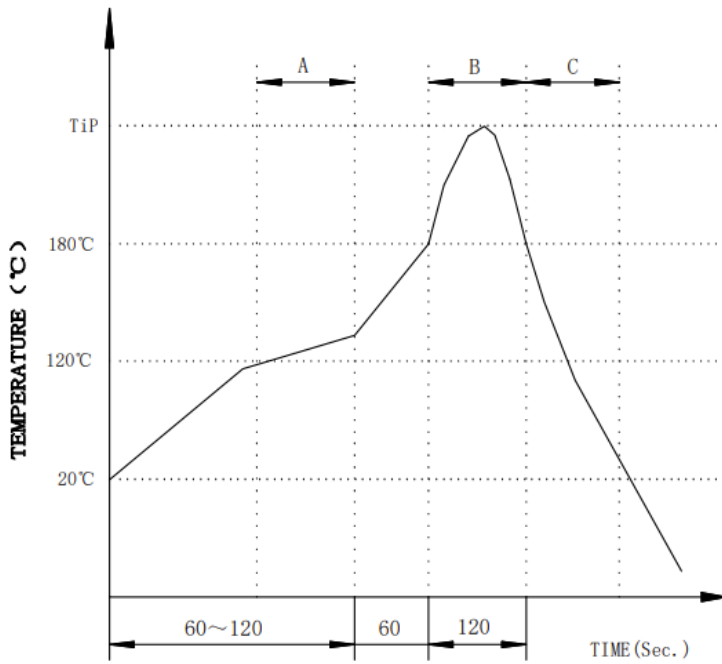

A.Preheating B.Soldering C.Gradual Cooling
 Tip temperature:260±5°C.
 Tip temperature time:5Sec Max.
 Tip melting point of Sn96.5/Ag3/Cu0.5:217°C.

Remarks: after wave soldering, the plastic positioning columns of the product which under the PCB will be slightly melted, but it won't affect its function.

4. Packaging

4.1 SPQ

90 pcs/tray

Tray dimension: 290*180*16 mm

Tray Weight: 0.42 kg

4.2 Carton

1 Carton = 28 trays = 2520 pcs

Carton dimensions: 410*310*250 mm

Carton Weight: 12.4 kg



4.3 Label

Taoglas Limited	
P/N NO: XXXXXXXX	
QYT: XXX PCS	DC: XXXX
DATE: XXXX-XX-XX	

SPQ Label (8x4cm)

Taoglas Limited	
P/N NO: XXXXXXXX	
PO: XXXXXXXX	B/N: XXXXXXXX
QYT: XXX PCS	DC: XXXX
DATE: XXXX-XX-XX	

Carton Label (8x4cm)

Changelog

Changelog for the datasheet

SPE-24-8-121 – TMJPD52F1188GWWA5SB7078

Revision: A (Original First Release)

Date:	2024-06-30
Notes:	
Author:	Javier Vasena

Previous Revisions



www.taoglas.com

